

Interface®

WORKBOOK

2025/26



MADE FOR MORE™



WE'RE MADE FOR MORE

It's flooring—and then some.

Because every floor is made to do more, mean more, for more. With countless colors, textures, patterns, and ways for you to create remarkable spaces.

Every Interface carpet tile, LVT and nora rubber floor is made with purpose and without compromise, to do all kinds of good.

Interface® Design Studio	04
Carbon Negative Flooring	06
TacTiles®	08
ReEntry®	10
nora® Rubber Flooring	12
LVT Collections	16
Carpet Tile Collections	44
Barrier Matting	306
Index	310

SHAPE YOUR SPACE WITH OUR EXPERTS



A human-focused, tailor-made, design service.

No two projects are alike – every space has its own challenges that must be addressed in order to create truly beautiful design. However, creative floor designs can be a really impactful way to bring a design vision to life.

Interface Design Studio can support you in finding beautiful, flooring solutions to help achieve your project requirements within your allocated budget.

All the support we offer is bespoke to the project and the designer, which can include creating custom colours, products or mood boards. We can get involved in just a single phase of the process or offer design support from start to finish.

Scan to find out more



Try our floor design tool



Carbon Negative Flooring

CHOOSE CARBON NEGATIVE FLOORING



Our carbon negative product offer is expanding by adding our CQuest™BioX backing as a standard option to even more products.

The carbon negative materials in the CQuest™BioX backing, in combination with speciality yarns and tufting processes, result in a carbon negative carpet tile. The finished product combines durability, industry-leading design, and a negative carbon footprint that ultimately benefits the planet and shows that the pursuits of great design and sustainability are inseparable.

First, we added new bio-based materials and more recycled content to our backings. Then, we measured how these materials influence the carbon footprint. These new materials, measured on a stand-alone basis, are net carbon negative – reducing our carbon footprint and resulting in carbon negative backings.

-CO₂

Carbon Negative with
CQuest™BioX backing option

Products highlighted with this symbol are offered with CQuest™BioX backing as a standard option.

Scan to find
out more



TacTiles®

GLUE-FREE CARPET TILE INSTALLATION

Scan to find
out more



TacTiles®. Easy. Quick. Clean.

The combination of simplicity, speed and great environmental qualities make TacTiles the perfect fit for Interface carpet tiles.

Inspired by the gecko's ability to seemingly "stick" to surfaces, TacTiles connect the carpet tiles to each other, creating a 'floating floor' that doesn't shrink or expand. That's how we eliminate the need for glue. No damage to the subfloor and no sticky mess during the installation.

TacTiles make carpet tile installation easy, quick and clean.



MADE FOR *circularity*



Scan to find
out more



A new home for your used floor.

Interface takes your used carpet tiles and puts them to good use – by making sure they get reused by small businesses driving the circular approach or charities and community groups to benefits those who really need it. Plus our products are designed to be fully recyclable, to make new carpet tiles for the future. Nothing goes to landfill.

It's part of our commitment to working in a way that's better for the planet and everyone. For over 25 years, our pursuit of sustainability has motivated our every choice. Globally, we prevent millions of metres of carpet going to landfill every year.





nora® Rubber Flooring

HIGH-QUALITY RUBBER FLOOR COVERINGS

Scan to find out more



Floor coverings with expertise in sustainability, functionality and design.

nora® floor coverings are made of high-quality natural and industrial rubber. They are mixed with minerals from natural sources and other components, such as colour pigments, pulled into blanks, pressed and then vulcanized under heat and high pressure.

Due to the special properties of rubber, norament and noraplan floor coverings don't require phthalate plasticisers and don't need to be coated. In addition, nora® floor coverings are slip resistant and highly flame retardant (acc. to EN 13501), exhibit outstanding ergonomic properties and absorb footfall sounds. They retain their unique functionality and aesthetics for decades.

The floor coverings are rounded off by an unparalleled range of accessories and an outstanding service for a design that is both harmonious and cross-functional - across all surfaces, stairs and levels.






NORAMENT® TILES

The pioneer among rubber floor coverings.


norament®, the classic rubber flooring is a convincing combination of sustainable quality and outstanding functionality. Pressed under high pressure, the tiles present a very dense, closed surface. This makes them extremely resistant to wear for the hardest requirements over decades.

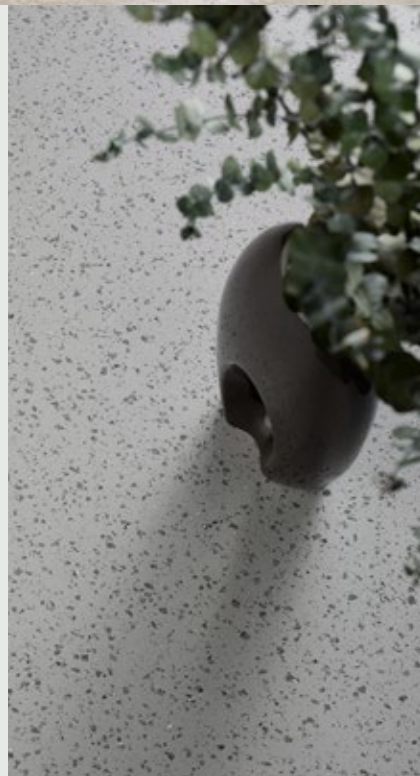

NORAPLAN® SHEETS

Unlimited design possibilities.

noraplan® floor coverings are available in rolls or tiles with a great many designs and colours for virtually unlimited design potential. The product range is made up of nine different designs.



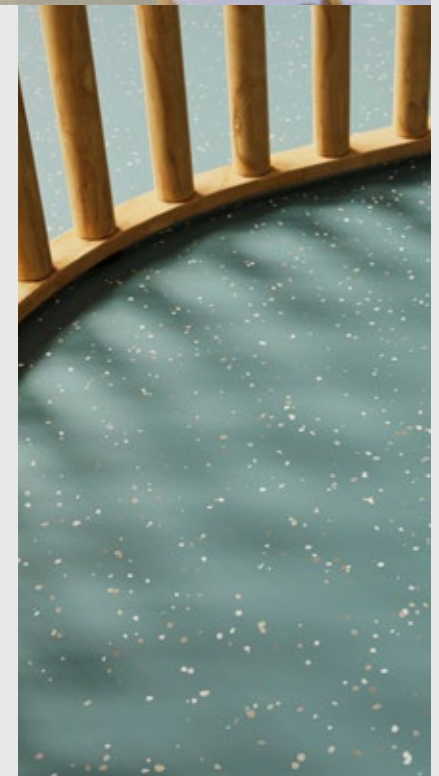




LVT COLLECTIONS

PRODUCT NORTHERN GRAIN COLOUR DARK WASH INSTALLED HERRINGBONE

Brushed Lines

		
A01601 TALC	A01602 ALABASTER	A01603 MIST
		
A01604 GALENA	A01605 GRAPHITE	A01606 KOHL
		
A01607 POWDER	A01608 SANDALWOOD	A01610 BISQUE
		
A01611 MOUSSE	A01612 SOFT SHADOW	A01613 BLUSH
		
A01614 HONEY	A01615 HENNA	A01616 ROUGE
		
A01617 DEW	A01618 CELADON	A01620 TEAL OXIDE
		
A01621 ARBELLA	A01622 DEEP COBALT	

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



PRODUCT BRUSHED LINES COLOURS MOUSSE & SANDALWOOD INSTALLED ASHLAR


Earthen Forms Collection | Crossroads



A03401 CORNERSTONE



A03402 MATERIA



A03403 STEPPING STONE



A03404 STRATA

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor+™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



PRODUCT CROSSROADS COLOUR CORNERSTONE INSTALLED ASHLAR

Earthen Forms Collection | Hearth



A03501 PETRA



A03502 GRIS




A03503 SANDSTONE



A03504 MARBLE DUST

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor+™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	3 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



PRODUCT HEARTH COLOUR MARBLE DUST INSTALLED ASHLAR

Earthen Forms Collection | On Grain



A03301 WHITE OAK VENEER



A03304 OILED WALNUT



A03307 PALE ASH



A03302 EUROPEAN WALNUT



A03305 BESPOKE TIMBER



A03308 SMOKEY ASH



A03303 HONEYED OAK



A03306 GOLDEN OAK

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor+™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



PRODUCT ON GRAIN COLOUR WHITE OAK VENEER INSTALLED HERRINGBONE

Fresco Valley Collection | Cliff



A02401 LAPIS



A02404 ALABASTER



A02402 SANDSTONE



A02405 GRANITE



A02403 LIMESTONE



A02406 IRONSTONE

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor+™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



PRODUCT CLIFF COLOUR LIMESTONE INSTALLED ASHLAR

Fresco Valley Collection | Great Heights



A02501 GREY PINE



A02502 HARD MAPLE



A02503 WHITE OAK



A02504 DOUGLAS FIR



A02505 SEQUOIA




A02506 BIRCH

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor+™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²




PRODUCT GREAT HEIGHTS COLOUR DOUGLAS FIR INSTALLED DESIGN BY TILE

Fresco Valley Collection | Ridge

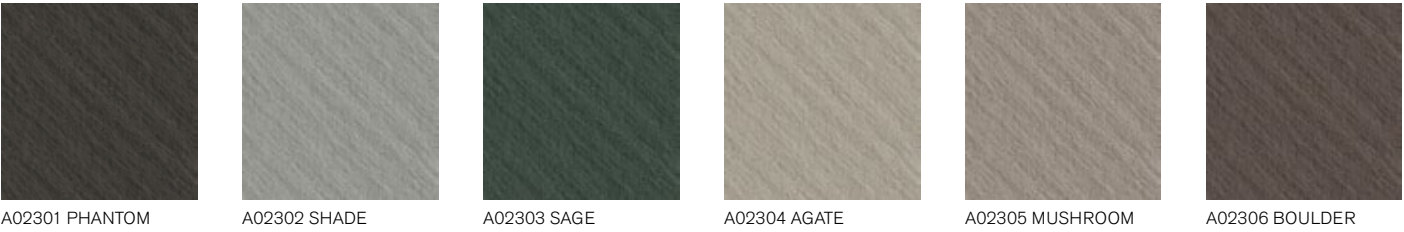





Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor+™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²




PRODUCT RIDGE COLOUR AGATE INSTALLED QUARTER TURN

Level Set® Collection

Natural Stones | Textured Stones

					
A00101 JET MIST	A00301 POLISHED CEMENT	A00302 COOL POLISHED CEMENT	A00307 CHESTNUT HORSEHAIR	A00308 LIGHT CONCRETE	A00311 DISTRESSED CONCRETE
					
A00103 COOL IMPALA MARBLE	A00303 WARM POLISHED CEMENT	A00304 EMPERADOR GRAY	A00309 MEDIUM CONCRETE	A00310 DARK CONCRETE	

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 5113) Jet Mist, Light Concrete, Medium Concrete, Dark Concrete, Distressed Concrete, Chestnut Horsehair
	R9 (DIN 5113) Cool Impala Marble, Emperador Gray, Polished Cement, Warm Polished Cement, Cool Polished Cement
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq. /m²



PRODUCT TEXTURED STONES COLOUR DARK CONCRETE INSTALLED MONOLITHIC

Level Set® Collection | Natural Woodgrains



A00201 BLACK WALNUT



A00205 STORM



A00208 SAND DUNE



A00214 BAMBOO



A00203 CHESTNUT



A00206 WINTER GREY



A00210 TEAK



A00204 BEECH



A00207 WASHED WHEAT



A00212 CEDAR

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 5113) Cedar, Teak, Bamboo
	R9 (DIN 5113) Black Walnut, Chestnut, Beech, Washed Wheat, Storm, Winter Grey, Sand Dune
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



PRODUCT NATURAL WOODGRAINS COLOUR BAMBOO INSTALLED DESIGN BY TILE

Level Set® Collection | Textured Woodgrains



A00403 DISTRESSED HICKORY



A00407 WHITE WASH



A00416 ANTIQUE DARK OAK



A00419 ANTIQUE ASH OAK



A00422 RUSTIC HICKORY



A00405 GREY DUNE



A00414 ANTIQUE MAPLE



A00417 SILVER DUNE



A00420 RUSTIC CASHEW



A00423 RUSTIC ASH



A00406 ANTIQUE LIGHT OAK



A00415 ANTIQUE OAK



A00418 CHARCOAL DUNE



A00421 RUSTIC OAK



A00424 RUSTIC BIRCH


Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 5113) Antique Light Oak, Grey Dune, Antique Oak, Antique Dark Oak, Silver Dune, Charcoal Dune, Antique Ash Oak, Rustic Birch, Rustic Ash, Rustic Hickory, Rustic Cashew, Rustic Oak
Carbon Footprint (cradle-to-gate)	R9 (DIN 5113) Antique Maple, White Wash, Distressed Hickory 9.20 kg CO ₂ eq. /m²



PRODUCT TEXTURED WOODGRAINS COLOUR ANTIQUE OAK INSTALLED HERRINGBONE

Look Both Ways Collection

Walk About

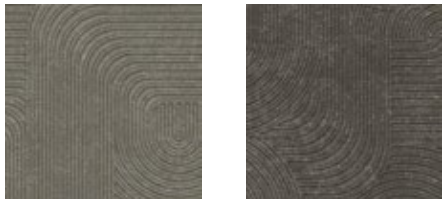

A01401 WARM ASH
A01402 PUMICE
A01403 COOL ASH
A01404 CARBON

Walk of Life



A01201 WARM ASH
A01202 PUMICE
A01203 COOL ASH
A01204 CARBON
A01205 CHARCOAL


Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq. /m²



PRODUCT WALK OF LIFE COLOUR COOL ASH
PRODUCT WALK ABOUT COLOUR CARBON INSTALLED DESIGN BY TILE

Look Both Ways Collection

Walk on By




A01501 POLYCHROME




A01502 MONOCHROME


Walk the Aisle




A01301 WARM ASH



A01302 PUMICE



A01303 COOL ASH



A01304 CARBON

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



Northern Grain



A02601 GLAZED OAK



A02604 DRIED OAK



A02607 DARK WASH



A02610 NATURAL SATIN



A02602 CHIFFON OAK



A02605 NORDIC WASH



A02608 GREY WASH



A02611 OAK SATIN



A02603 BARE OAK



A02606 ANTIQUE WASH



A02609 AGED SATIN



A02612 DARK SATIN

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor+™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m² (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m²
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)
Carbon Footprint (cradle-to-gate)	9.20 kg CO ₂ eq./m²



PRODUCT NORTHERN GRAIN COLOUR CHIFFON OAK INSTALLED HERRINGBONE



CARPET TILE COLLECTIONS

PRODUCT UNDULATING WATER COLOUR SPINIFEX INSTALLED ASHLAR
PRODUCT ESCARPMENT COLOUR SPINIFEX NEUTRAL INSTALLED ASHLAR

A Cut Above M0833



7274010 AMBER




7274011 CARNATION



7274012 LEATHER



7274013 SIENNA

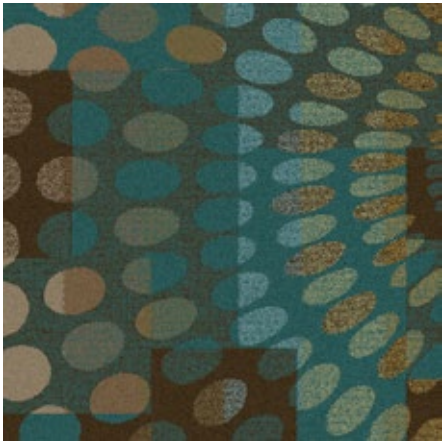

7274014 PACIFIC

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	888 g/m² ± 5%
Pile Height	4.2 mm + 15% / - 10%
Total Thickness	9.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 5BAEEB69
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3.86 kg CO ₂ eq. /m²



PRODUCT A CUT ABOVE COLOUR PACIFIC INSTALLED NON DIRECTIONAL


City of Angels



8130001 DAWN



8130002 DUSK



8130003 MIDNIGHT

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1182 g/m² ± 5%
Pile Height	4.5 mm + 15% / - 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 7FBFD73A
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.60 kg CO ₂ eq. /m²



PRODUCT CITY OF ANGELS COLOUR MIDNIGHT INSTALLED MONOLITHIC

Collins Cottage










8152003 HOUND CHARCOAL 8152004 HOUND BLACK 8152009 HOUND B & W

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m² ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	7.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - E5AE7AAC
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq./m²



CARPET PRODUCT COLLINS COTTAGE COLOUR HOUND CHARCOAL INSTALLED NON DIRECTIONAL
LVT PRODUCT TEXTURED WOODGRAINS COLOUR ANTIQUE LIGHT OAK INSTALLED ASHLAR

Composure Collection | Composure


					
4169002 DIFFUSE	4169003 SOLITUDE	4169005 SERENE	4169007 TRANSCRIBE	4169008 ISOLATION	4169009 CONTENT
					
4169011 SOOTHE	4169012 RETREAT	4169014 CONTEMPLATE	4169015 HARMONIOUS	4169016 RESERVED	4169017 SECLUSION
					
4169018 REGARD	4169019 PATIENCE	4169020 SECURE	4169021 DELIBERATE	4169058 SAPPHIRE	4169059 MARINE
					
4169060 SAILING	4169061 PEWTER	4169062 LAVENDER	4169063 AUBERGINE	4169064 BERRY	4169065 CRANBERRY
					
4169066 ABYSS	4169067 HARBOUR	4169068 WAVE	4169069 WILLOW	4169070 FERN	4169071 OLIVE
					
4169072 AMBER	4169073 SUNBURST				

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	570 g/m² ± 5%
Pile Height	2.6 mm + 15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FE7272A5
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.24 kg CO ₂ eq. /m²



PRODUCT COMPOSURE COLOUR CONTEMPLATE INSTALLED NON DIRECTIONAL

Composure Collection | Composure Edge







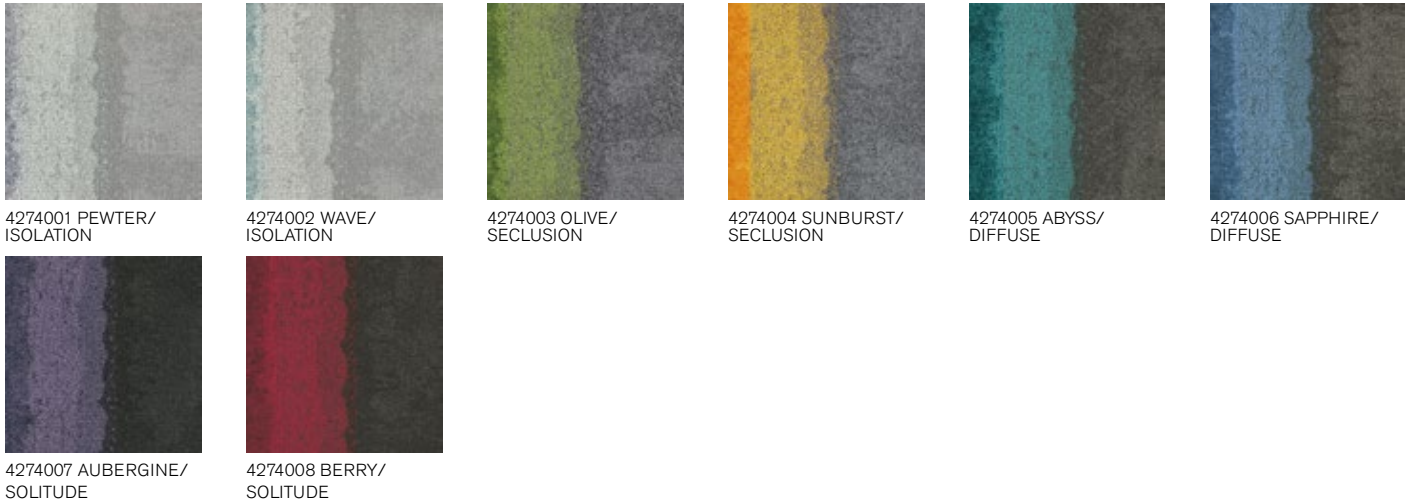


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	665 g/m² ± 5%
Pile Height	3.0 mm + 15% / - 10%
Total Thickness	6.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6F2E721C
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.74 kg CO ₂ eq. /m²




PRODUCT COMPOSURE EDGE COLOUR WAVE/ISOLATION
PRODUCT COMPOSURE COLOURS WAVE & ISOLATION INSTALLED NON DIRECTIONAL

Connected Ethos Collection | CE100

					
4314001 CONNECT	4314002 GAZE	4314003 EXPLORE	4314004 OBSERVE	4314005 EVOLVE	4314006 CONSIDER
					
4314007 EXPOSE	4314008 REVEAL	4314009 AWAKE	4314010 EMULATE	4314011 PERCEIVE	4314012 IDENTIFY
					
4314013 DISTINGUISH	4314014 SURVEY	4314015 CREATE	4314016 AFFIRM	4314017 CONTEND	4314018 CONFIRM
					
4314019 SUSTAIN	4314020 CAPTIVATE	4314021 ENCOUNTER	4314022 SEARCH	4314023 SHADE	4314024 UNCOVER
					
4314025 UNEARTH	4314026 BREATHE	4314027 EMBODY	4314028 ESCAPE	4314029 EMBARK	4314030 ENCHANT
					
4314031 EXIST	4314032 SCENIC				

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	624 g/m² ± 5%
Pile Height	3.0 mm + 15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2.4% (EN 986)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 5CE3AAE2
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.16 kg CO ₂ eq. /m²



PRODUCT CE100 COLOUR OBSERVE INSTALLED NON DIRECTIONAL

Connected Ethos Collection | CE200




Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	747 g/m² ± 5%
Pile Height	4.0 mm ± 5%
Total Thickness	7.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2.4% (EN 986)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4C5EDE85
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.49 kg CO ₂ eq. /m²




CARPET PRODUCT CE200 COLOUR CONSIDER/ESCAPE INSTALLED DESIGN BY TILE
CARPET PRODUCT CE100 COLOURS CONSIDER & ESCAPE INSTALLED NON DIRECTIONAL
LVT PRODUCT TEXTURED WOODGRAINS COLOUR ANTIQUE LIGHT OAK INSTALLED ASHLAR

Contemplation

					
4263001 HOMESPUN	4263002 PASTORAL	4263003 ELEMENT	4263004 RUSTIC	4263005 ARCADIAN	4263006 HANDICRAFT
					
4263007 FUNDAMENTAL	4263008 ARTISAN	4263009 PRIMITIVE	4263010 ETHEREAL	4263011 ASPECT	4263012 RURAL

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	580 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 1206E2B1
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.40 kg CO ₂ eq. /m²



PRODUCT CONTEMPLATION COLOUR ELEMENT INSTALLED NON DIRECTIONAL


Darning



9273018 SILVER



9273019 ALMOND



9273020 SAGE

Backing	CQuest™Bio	 
Product Definition	Tapestry Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	746 g/m² ± 5%	
Pile Height	3.3 mm + 15% / - 10%	
Total Thickness	6.9 mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2.4 (EN 985)	
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0.20 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS - 7DFFCB85	
Packaging	5 m²	 
Carbon Footprint (cradle-to-gate)	3.12 kg CO ₂ eq. /m²	



PRODUCT DARNING COLOUR SILVER INSTALLED ASHLAR

Decibel











9275001 B&W DECIBEL

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m² ± 5%
Pile Height	3.2 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B0F94CD8
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.12 kg CO ₂ eq. /m²



PRODUCT DECIBEL COLOUR B&W DECIBEL INSTALLED ASHLAR

Elevation III

					
4199001 COLLETINO	4199002 BROCATELLO	4199003 PALISSANDRA	4199004 CIOCCOLATO	4199005 FIOR DI PESCO	4199006 CEPPO DI GRE
					
4199007 GRIGIO NILO	4199008 PORTORO	4199009 CARRARA	4199010 JURA	4199011 VALDEORRAS	4199012 NERO MAQUINA
					
4199013 BOTTICINO	4199014 ROMANO CLASSICO	4199015 CREMA LUNA	4199016 OPALE NATURALE	4199017 CIPOLLINO	4199018 AQUA MARINA
					
4199019 AZURO CIELO	4199020 ZIRCONA				

Backing	CQuest™Bio
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	360 g/m² ± 5%
Total Thickness	4.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 17E5CE5A
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2.47 kg CO ₂ eq. /m²



PRODUCT ELEVATION III COLOUR GRIGIO NILO INSTALLED QUARTER TURN

Embodied Beauty™ Collection | Geisha Gather



9551001 LIMESTONE



9551002 TAUPE



9551003 ASH



9551004 INDIGO



9551005 COAL



9551006 JET

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	882 g/m² ± 5%
Pile Height	4.8 mm + 15% / - 10%
Total Thickness	8.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 366AACBE
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²



CARPET PRODUCT GEISHA GATHER COLOUR TAUPE INSTALLED ASHLAR
LVT PRODUCT WALK OF LIFE COLOUR COOL ASH INSTALLED MONOLITHIC

Embodied Beauty™ Collection | Sashiko Stitch



9552001 FLINT




9552002 ASH



9552003 INDIGO



9552004 JET



9552005 POPPY




9552006 JADEITE


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	712 g/m² ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6F85E829
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.01 kg CO ₂ eq. /m²



PRODUCT SASHIKO STITCH COLOUR FLINT INSTALLED ASHLAR

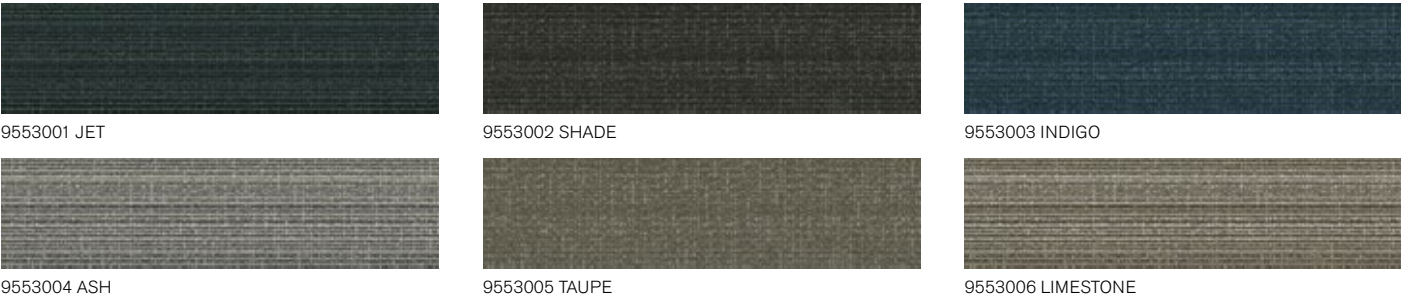

Backing	CQuest™BioX
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	407 g/m² ± 5%
Pile Height	2.0 mm + 15% / - 10%
Total Thickness	5.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C0E56A52
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	-0.30 kg CO ₂ eq. /m²



PRODUCT SHISHU STITCH COLOUR SHADE INSTALLED HERRINGBONE

Embodied Beauty™ Collection | Simple Sash



9554001 FLINT



9554002 ALBA



9554003 ASH



9554004 INDIGO



9554005 COAL




9554006 JET

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	644 g/m² ± 5%
Pile Height	3.1 mm + 15% / - 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CFADAB59
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	2.80 kg CO ₂ eq. /m²



PRODUCT SIMPLE SASH COLOUR ALBA INSTALLED ASHLAR



Backing	CQuest™BioX	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Solution Dyed Nylon, contains recycled content	
Pile Yarn Weight	407 g/m² ± 5%	
Pile Height	2.4 mm + 15% / - 10%	
Total Thickness	6.0 mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)	
Castor Chair	≥ 2.4 (EN 985)	
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0.15 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS - 317E24EF	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	-0.30 kg CO ₂ eq. /m²	



PRODUCT TOKYO TEXTURE COLOUR ASH INSTALLED HERRINGBONE

Embodied Beauty™ Collection | Vintage Kimono



9556001 LIMESTONE



9556002 TAUPE



9556003 ASH



9556004 INDIGO



9556005 COAL



9556006 JET

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	882 g/m² ± 5%
Pile Height	2.4 mm + 15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 953B9414
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²




PRODUCT VINTAGE KIMONO COLOURS ASH & COAL INSTALLED ASHLAR

Embodied Beauty™ Collection | Zen Stitch

[-CO₂]



Backing	CQuest™BioX
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	407 g/m² ± 5%
Pile Height	2.2 mm + 15% / - 10%
Total Thickness	5.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CDB3BF76
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	-0.30 kg CO ₂ eq. /m²




PRODUCT ZEN STITCH COLOUR ASH INSTALLED HERRINGBONE

Employ Collection | Employ Constant



Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m² ± 5%
Pile Height	2.2 mm + 15% / - 10%
Total Thickness	5.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3F22B60F
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	5.72 kg CO ₂ eq. /m²



PRODUCT EMPLOY CONSTANT COLOUR AZURE INSTALLED ASHLAR

Employ Collection | Employ Dimensions



4271001 VOLUME



4271004 PARALLEL



4271007 LINE



4271010 OBJECT



4271002 SURFACE




4271005 TIME



4271008 MEASURE



4271003 CONNECT



4271006 SCALE



4271009 SEGMENT

Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m² ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6684AD28
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	5.72 kg CO ₂ eq. /m²



PRODUCT EMPLOY DIMENSIONS COLOUR PARALLEL INSTALLED ASHLAR
PRODUCT EMPLOY LOOP COLOUR JET INSTALLED MONOLITHIC

Employ Collection | Employ Lines













Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m² ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 54BC02D7
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	5.72 kg CO ₂ eq. /m²



PRODUCT EMPLOY LINES COLOUR FORMATION INSTALLED NON DIRECTIONAL

Employ Collection | Employ Loop

					
4197001 RAFFIA	4197002 TRUFFLE	4197003 SHADOW	4197004 CARAMEL	4197005 PRALINE	4197006 SHALE
					
4197007 NUTMEG	4197008 FOUNTAIN	4197009 JET	4197010 RYE	4197011 CIRRUS	4197012 ATLANTIC
					
4197013 CRYSTAL	4197014 TROPICAL	4197015 KIWI	4197016 NORDIC	4197017 PEACOCK	4197018 EDEN
					
4197019 BARING	4197020 OXFORD	4197021 CLEMENTINE	4197022 SAPPHIRE	4197023 LAVENDER	4197024 SALSA
					
4197025 COTTON	4197026 GROUND	4197027 URBAN	4197028 ASH	4197029 GRANITE	4197030 GRITSTONE
					
4197031 SANDS	4197032 AUTUMN	4197033 BRICK	4197034 FERN	4197035 EVERGLADE	4197036 INK

Backing	CQuest™Bio
Product Definition	Tufted Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	518 g/m² ± 5%
Pile Height	2.6 mm + 15% / - 10%
Total Thickness	5.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - D9884A79
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	6.26 kg CO ₂ eq. /m²



PRODUCT EMPLOY LOOP COLOUR FOUNTAIN INSTALLED MONOLITHIC

Equilibrium



1190092 PERSISTENCE



1190094 CONTINUITY



1190095 CONSISTENCY



1190096 EQUALITY



1190018 MOBILITY



1190021 EQUATION



1190022 SYMMETRY



1190023 SERENITY



1190026 CONTENTMENT



1190028 HARMONY



1190029 MODERATION



1190031 UNIFORMITY

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m² ± 5%
Pile Height	4.1 mm + 15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B2AACDC5
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.66 kg CO ₂ eq. /m²



ASHLEAR



MONOLITHIC



QUARTER TURN



CERTIFIED
cradle to cradle
SILVER



-CO₂
Carbon Negative with
CQuest™ BioX backing option



100%
Recycled Nylon



PRODUCT EQUILIBRIUM COLOUR EQUATION INSTALLED MONOLITHIC


Etched & Threaded Collection | E610



600Q001 SLATE



600Q002 FELDSPAR



600Q003 SANDSTONE




600Q004 YELLOWSTONE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1390 g/m² ± 5%
Pile Height	6.2 mm + 15% / - 10%
Total Thickness	10.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CF3C71DA
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	5.10 kg CO ₂ eq. /m²



PRODUCT E610 COLOUR FELDSPAR INSTALLED MONOLITHIC

Etched & Threaded Collection | E611

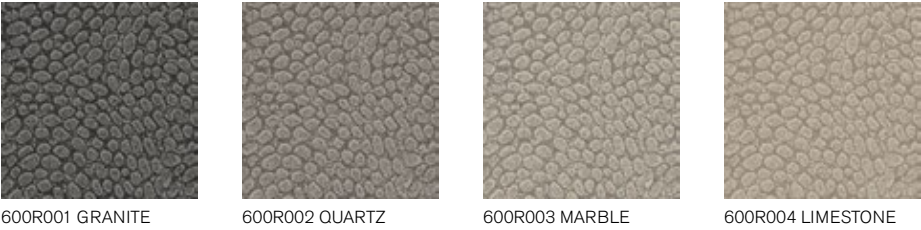

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1051 g/m² ± 5%
Pile Height	4.9 mm + 15% / - 10%
Total Thickness	9.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 05CEC2E7
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.06 kg CO ₂ eq. /m²



PRODUCT E611 COLOUR GRANITE INSTALLED MONOLITHIC

Etched & Threaded Collection | E612



600S001 UMBER



600S004 FOG



600S007 STRAW



600S002 MINERAL



600S005 DUSK



600S008 WHEAT



600S003 FLANNEL



600S006 SEPIA

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m² ± 5%
Pile Height	5.6 mm + 15% / - 10%
Total Thickness	8.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A5874ACD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²



PRODUCT E612 COLOUR STRAW INSTALLED ASHLAR

Etched & Threaded Collection | E613



600T001 UMBER



600T004 FOG



600T007 STRAW



600T002 MINERAL



600T005 DUSK



600T008 WHEAT



600T003 FLANNEL



600T006 SEPIA

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	4.5 mm + 15% / - 10%
Total Thickness	7.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B23C5EAA
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq. /m²



Etched & Threaded Collection | E614



600U001 BARK



600U004 CONCRETE



600U007 RAFFIA



600U002 CHARCOAL



60U005 BIRCH



600U008 LINEN



600U003 STORM



600U006 BROWNSTONE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m² ± 5%
Pile Height	5.4 mm + 15% / - 10%
Total Thickness	8.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B872F45E
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²



PRODUCT E614 COLOUR BARK INSTALLED ASHLAR

Etched & Threaded Collection | E615



600V001 BARK



600V004 CONCRETE



600V007 RAFFIA



600V002 CHARCOAL



60V005 BIRCH



600V008 LINEN



600V003 STORM



600V006 BROWNSTONE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m² ± 5%
Pile Height	4.7 mm +15% / - 10%
Total Thickness	7.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 12C637CB
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.33 kg CO ₂ eq. /m²



PRODUCT E615 COLOUR BROWNSTONE INSTALLED ASHLAR

Etched & Threaded Collection | E616



600W001 WALNUT



600W004 PLATINUM



600W007 JUTE



600W002 IRON



60W005 TIMBER



600W008 PARCHMENT



600W003 PEWTER



600W006 WINTER

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B5ED6DA7
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2.69 kg CO ₂ eq. /m²



PRODUCT E616 COLOUR JUTE
PRODUCT E614 COLOUR RAFFIA INSTALLED ASHLAR

Haptic




9274021 WHISPER



9274022 BALSAM



9274023 LACE

Backing	CQuest™Bio	
Product Definition	Tapestry Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	814 g/m² ± 5%	
Pile Height	2.9 mm +15% / - 10%	
Total Thickness	6.9 mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2.4 (EN 985)	
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0.20 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS - 3E38FAA3	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3.33 kg CO ₂ eq. /m²	



CARPET PRODUCT HAPTIC COLOUR LACE
LVT PRODUCT NATURAL WOODGRAINS COLOUR BEECH INSTALLED ASHLAR

Head Over Heels M0684




6640026 BEACH



6640027 SEPIA



6640028 TERRACOTTA

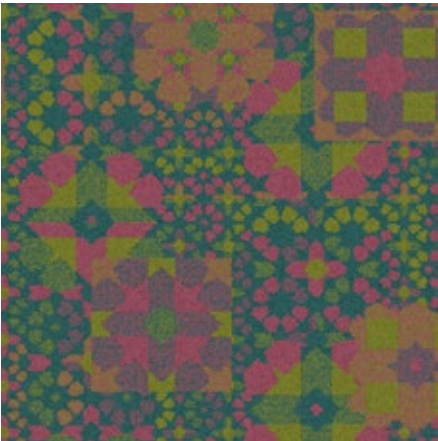

6640029 CARNIVAL



6640030 ANTIQUE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²



PRODUCT HEAD OVER HEELS M0684 COLOUR SEPIA INSTALLED NON DIRECTIONAL

Head Over Heels M0749



6640035 SPRING



6640036 SCARLET



6640037 SKY



6640038 FAWN



6640039 POWDER

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²



PRODUCT HEAD OVER HEELS M0749 COLOUR SPRING INSTALLED NON DIRECTIONAL

Head Over Heels M0827



6640031 FUCHSIA



6640032 AZURE



6640033 SAFFRON




6640034 CORNFLOWER

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²



PRODUCT HEAD OVER HEELS M0827 COLOUR CORNFLOWER INSTALLED NON DIRECTIONAL

Head Over Heels M1032










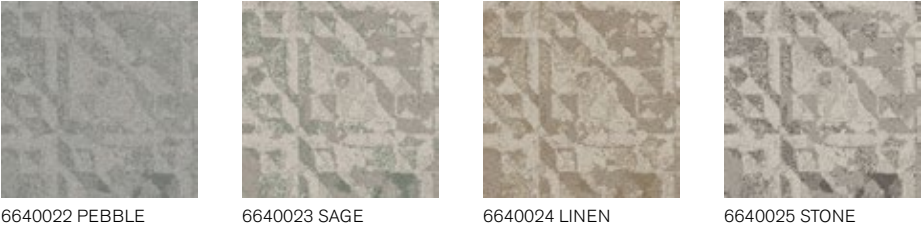


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m² ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²



CARPET PRODUCT HEAD OVER HEELS M1032 COLOUR SAGE INSTALLED NON DIRECTIONAL
LVT PRODUCT NATURAL WOODGRAINS COLOUR SAND DUNE INSTALLED ASHLAR

Heuga 530 II




					
4288001 GRAVEL	4288002 PEBBLE	4288003 STONE	4288004 CARBON	4288005 SILVER	4288006 DOLPHIN
					
4288007 BASALT	4288008 BLACK	4288009 SILK GREY	4288010 CASHMERE	4288011 BARK	4288012 TAUPE
					
4288013 GOLDEN YELLOW	4288014 TERRACOTTA	4288015 DUSTY ROSE	4288016 FROSTED LILAC	4288017 DOVE BLUE	4288018 INDIGO
					
4288019 BLUEBERRY	4288020 BLUE MOON	4288021 GINGER	4288022 SAGE	4288023 MINT	4288024 FOREST

Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	660 g/m² ± 5%
Pile Height	3.4 mm + 15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A70BBCAF
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.68 kg CO ₂ eq. /m²



CARPET PRODUCT HEUGA 530 II COLOUR SILVER INSTALLED MONOLITHIC

Heuga 580 II



					
1267225 NICKEL	1267226 ELEPHANT	1267229 OYSTER	1267232 ONYX	1267233 ZIRCON	1267234 EARTH
					
1267236 BLACK	1267237 QUARTZ	1267239 ROSEWOOD	1267240 TIMBER	1267244 WENGE	1267245 CANARY
					
1267246 CANTALOUPE	1267250 FLAMINGO	1267253 LAVENDER	1267257 LEAK BLUE	1267259 BLUE MOON	1267260 BLUEBERRY
					
1267262 DEEP RIVER	1267265 LAUREL	1267268 WINDSOR GREEN	1267270 PEAR	1267271 THE SHIRE	1267274 REEF

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	580 g/m² ± 5%
Pile Height	2.7 mm + 15% / - 10%
Total Thickness	5.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C2CBC58F
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²



CARPET PRODUCT HEUGA 580 II COLOURS ROSEWOOD & FLAMINGO INSTALLED MONOLITHIC
LVT PRODUCT NATURAL WOODGRAINS COLOUR CEDAR INSTALLED ASHLAR

Heuga 725










					
1272036 GRAPHITE	1272037 PLATIN	1272038 OYSTER	1272039 PANTHER	1272061 ELEPHANT	1272040 COPRA
					
1272062 REAL BLACK	1272041 COAL	1272042 VIPER	1272046 RED	1272047 BOUGAINVILLEA	1272049 BORDEAUX
					
1272050 VELVET	1272052 TURQUOISE	1272053 SPRING	1272054 OCEAN	1272055 TRUE BLUE	1272057 NIGHTSKY

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Cut Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	720 g/m² ± 5%
Pile Height	4.2 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 18E62AD3
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.41 kg CO ₂ eq. /m²



PRODUCT HEUGA 725 COLOUR ELEPHANT INSTALLED MONOLITHIC

Heuga 727 (Piece Dyed, PD)










					
4122140 CAYENNE (PD)	4122143 MAUVE (PD)	4122144 PASHMINA (PD)	4122290 IRON (PD)	4122291 MAHOGANY (PD)	4122292 PUMPKIN (PD)
					
4122293 CRIMSON (PD)	4122294 CHESTNUT (PD)	4122295 ROSE (PD)	4122296 HEATHER (PD)	4122297 PLUM (PD)	4122298 LAPIS (PD)
					
4122299 INDIGO (PD)	4122300 CAPRI (PD)	4122301 TURQUOISE (PD)	4122302 TEAL (PD)	4122303 EUCALYPTUS (PD)	4122304 YELLOW GREEN (PD)
					
4122305 FOREST (PD)	4122306 FERN (PD)	4122307 MOSS (PD)			

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	580 g/m² ± 5%
Pile Height	2.6 mm + 15% / - 10%
Total Thickness	5.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CBD6BE5B
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²



CARPET PRODUCT HEUGA 727 COLOUR TURQUOISE INSTALLED MONOLITHIC
LVT PRODUCT NATURAL WOODGRAINS COLOUR WINTER GREY INSTALLED ASHLAR

Heuga 727 (Solution Dyed, SD)

					
4122120 PLATIN (SD)	4122121 ELEPHANT (SD)	4122122 GRAPHITE (SD)	4122123 COAL (SD)	4122124 DUST (SD)	4122125 PEBBLES (SD)
					
4122126 PANTHER (SD)	4122127 ONYX (SD)	4122128 SILVER (SD)	4122129 COPRA (SD)	4122131 NUTMEG (SD)	4122132 OYSTER (SD)
					
4122133 LINEN (SD)	4122138 HOT PEPPER (SD)	4122139 CHOCOLATE (SD)	4122142 AMARYLLIS (SD)	4122152 MERCURY (SD)	4122153 LAVENDER (SD)
					
4122155 BLUE RIBAND (SD)	4122308 PEWTER (SD)	4122309 BASALT (SD)	4122310 MINK (SD)	4122311 PEARL BROWN (SD)	4122312 SALMON (SD)
					
4122313 PINE (SD)	4122314 SAGE (SD)	4122315 BOTTLE GREEN (SD)			

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	535 g/m² ± 5%
Pile Height	.5 mm + 15% / - 10%
Total Thickness	5.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 69D9C999
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2.93 kg CO ₂ eq. /m²



CARPET PRODUCT HEUGA 727 COLOUR OYSTER INSTALLED MONOLITHIC
LVT PRODUCT NATURAL WOODGRAINS COLOUR CHESTNUT INSTALLED ASHLAR

Hip Over History M0939



7191001 VINTAGE



7191002 PINE



7191003 BOUQUET



7191004 EDEN



7191005 ORIENT

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Tile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m² ± 5%
Pile Height	3.5 mm + 15% / - 10%
Total Thickness	7.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 7B6AFAE2
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3.66 kg CO ₂ eq. /m²




CARPET PRODUCT HIP OVER HISTORY M0939 COLOUR ORIENT INSTALLED NON DIRECTIONAL
LVT PRODUCT TEXTURED WOODGRAINS COLOUR ANTIQUE LIGHT OAK INSTALLED ASHLAR

Human Connections® Collection

Flagstone




8338001 GRANITE 8338002 SLATE

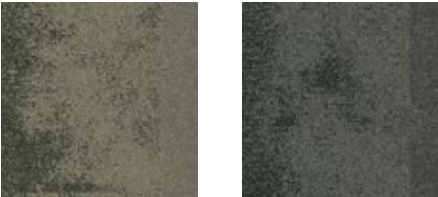


8338003 FLINT 8338004 ONYX

Kerbstone

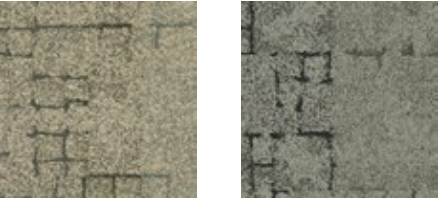

8339001 GRANITE 8339002 SLATE

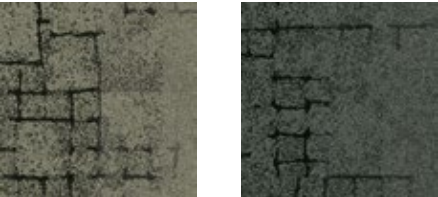

8339003 FLINT 8339004 ONYX

Backing	CQuest™Bio		
Product Definition	Tapestry Tufted Patterned Structured Loop Pile		
Pile Material	100% Recycled Solution Dyed Nylon		
Pile Yarn Weight	Flagstone 780	Kerbstone 746	g/m² ± 5% mm + 15% / - 10% mm ± 0.5 mm
Pile Height	Flagstone 3.6	Kerbstone 3.5	
Total Thickness	Flagstone 6.9	Kerbstone 6.9	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1		
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)		
Castor Chair	≥ 2.4 (EN 985)		
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)		
Sound Absorption	α _w 0.20 (EN ISO 11654)		
Indoor Air Quality	Flagstone CE8E7E05	Kerbstone EA8EAFFB	GUT PRODIS
Packaging	4 m²		
Carbon Footprint (cradle-to-gate)	Flagstone 3.22	Kerbstone 3.12	kg CO ₂ eq. /m²

NON DIRECTIONAL

CERTIFIED



cradle to cradle

SILVER

-CO₂

Carbon Negative with CQuest™BioX backing option




100% Recycled Nylon




PRODUCT FLAGSTONE COLOURS FLINT & ONYX
PRODUCT SET IN STONE COLOUR ONYX INSTALLED NON DIRECTIONAL

Human Connections® Collection | Paver

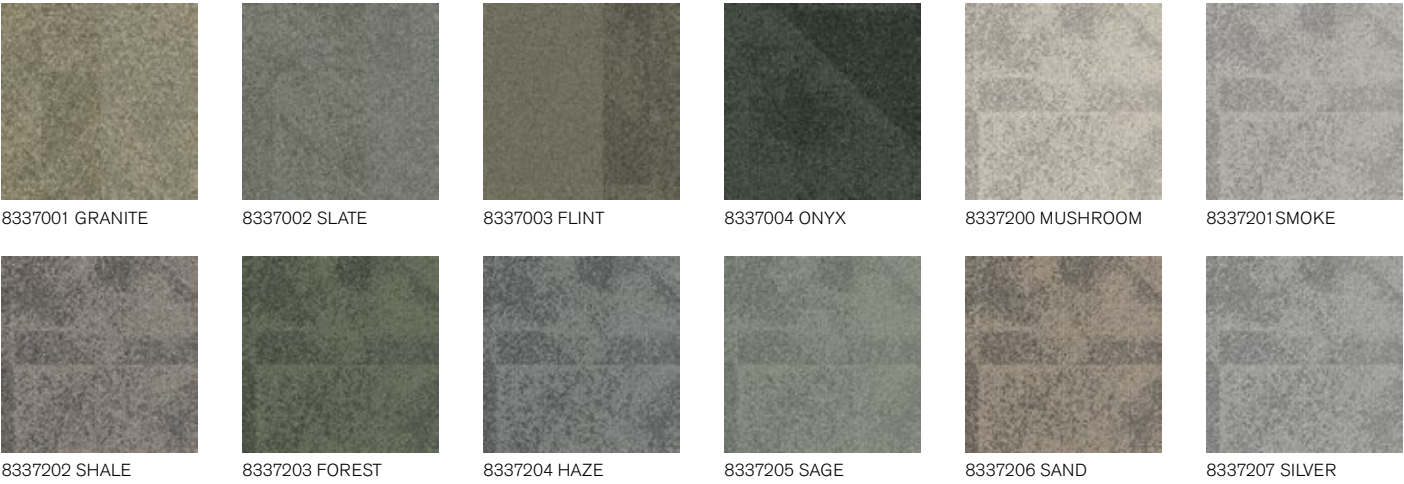


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	645 g/m² ± 5%
Pile Height	3.4 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DA5DB7CB
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	2.80 kg CO ₂ eq. /m²




PRODUCT PAVER COLOUR SHALE INSTALLED NON DIRECTIONAL

Human Connections® Collection

Moss

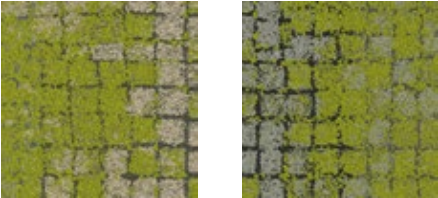


8341001 GRANITE/ MOSS
8341002 SLATE/ MOSS

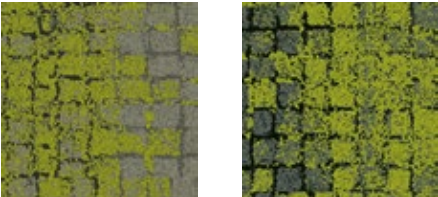


8341003 FLINT/ MOSS
8341004 ONYX/ MOSS

Moss in Stone

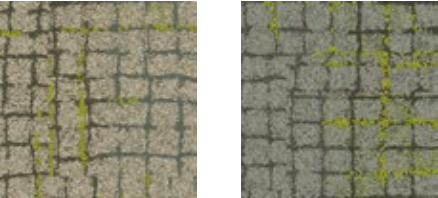


8340001 GRANITE EDGE
8340002 SLATE EDGE

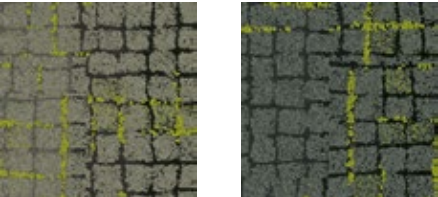


8340003 FLINT EDGE
8340004 ONYX EDGE

Sett in Stone

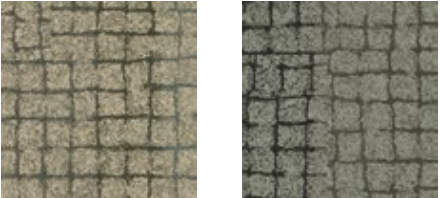

8342001 GRANITE
8342002 SLATE

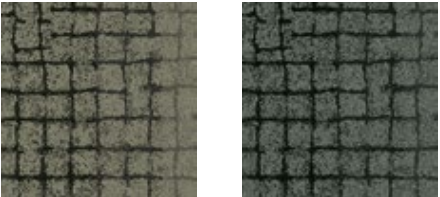

8342003 FLINT
8342004 ONYX

Backing	CQuest™Bio			
Product Definition	Tapestry Tufted Patterned Structured Loop Pile			
Pile Material	100% Recycled Solution Dyed Nylon			
Pile Yarn Weight	Moss 916	Moss in Stone 848	Sett in Stone 746	g/m² ± 5% mm + 15% / - 10% mm ± 0.5 mm
Pile Height	Moss 4.0	Moss in Stone 3.9	Sett in Stone 4.0	
Total Thickness	Moss 7.9	Moss in Stone 8.0	Sett in Stone 7.0	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1			
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)			
Castor Chair	≥ 2.4 (EN 985)			
Impact Sound Insulation (ΔL _w)	Moss 25	Moss in Stone 25	Sett in Stone 26	dB (EN ISO 10140-3)
Sound Absorption	α _w 0,0 (EN ISO 11654)			
Indoor Air Quality	Moss D9EFBDB9	Moss in Stone 9CA7E130	Sett in Stone ADD5EB6A	GUT PRODIS m²
Packaging	Moss 3	Moss in Stone 3	Sett in Stone 4	
Carbon Footprint (cradle-to-gate)	Moss 3.64	Moss in Stone 3.43	Sett in Stone 3.12 kg	CO ₂ eq. /m²

NON DIRECTIONAL

CERTIFIED

cradle to cradle

SILVER

100%
Recycled Nylon



PRODUCT MOSS IN STONE COLOUR FLINT EDGE
PRODUCT SETT IN STONE COLOUR FLINT
PRODUCT MOSS COLOUR FLINT/ MOSS INSTALLED DESIGN BY TILE

Human Connections® Collection


Rue



8344001 GREY



8344002 TEAL



8344003 GREEN



8344004 YELLOW




8344005 ORANGE



8344006 RED



8344007 PINK



8344008 PURPLE

Stone Course



8343001 GREY/STONE




8343002 TEAL/STONE




8343003 GREEN/STONE




8343004 YELLOW/STONE



8343005 ORANGE/STONE



8343006 RED/STONE



8343007 PINK/STONE



8343008 PURPLE/STONE

Backing	CQuest™Bio		
Product Definition	Tapestry Tufted Patterned Structured Loop Pile		
Pile Material	100% Recycled Solution Dyed Nylon		
Pile Yarn Weight	Rue 916	Stone Course 916	g/m² ± 5% mm + 15% / - 10% mm ± 0.5 mm
Pile Height	Rue 4.5	Stone Course 3.7	
Total Thickness	Rue 8.3	Stone Course 7.9	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2		
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)		
Castor Chair	≥ 2.4 (EN 985)		
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)		
Sound Absorption	α _w 0.20 (EN ISO 11654)		
Indoor Air Quality	Rue 6E1F82D1	Stone Course E5BB54AB	kg CO ₂ eq. /m²
Packaging	4 m²		
Carbon Footprint (cradle-to-gate)	Rue 3.64	Stone Course 3.64	

NON DIRECTIONAL

CERTIFIED

cradle to cradle

SILVER

100%
Recycled Nylon



PRODUCT RUE COLOURS RED & ORANGE
PRODUCT STONE COURSE COLOURS ORANGE/STONE & GREY/STONE
INSTALLED DESIGN BY TILE

Human Nature® Collection | HN810



7617002 NICKEL



7617003 SLATE



7617004 LIMESTONE



7617006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1150 g/m² ± 5%
Pile Height	4.5 mm +15% / - 10%
Total Thickness	8.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 0F564617
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.37 kg CO ₂ eq. /m²



PRODUCT HN810 COLOUR LIMESTONE INSTALLED HERRINGBONE

Human Nature® Collection | HN820



7627002 NICKEL



7627003 SLATE




7627004 LIMESTONE



7627006 SHALE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Cut and Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>*Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FE6942E9
Packaging	4.5 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq. /m²



PRODUCT HN820 COLOUR SLATE INSTALLED HERINGBONE


Human Nature® Collection | HN830



7621001 PERSIMMON



7621002 MAIZE




7621003 BLACK



7621004 COBALT



7621005 CLEMENTINE



7621006 KIWI



7621007 PISTACHIO



7621008 BONE

Backing	CQuest™Bio
Product Definition	Tufted Plain Shag Cut Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1425 g/m² ± 5%
Pile Height	8.2 mm +15% / - 10%
Total Thickness	11.6 mm ± 0.5 mm
Wear Classification	General Contract (EN 1307) Class 32 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥2.0 (EN 985)
Impact Sound Insulation (ΔL _w)	30 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4A9DB8ED
Packaging	2.5 m²
Carbon Footprint (cradle-to-gate)	5.21 kg CO ₂ eq./m²




Borders, Accents and Insets Only



PRODUCT HN830 COLOUR KIWI PRODUCTS HN810, 840 & 850 COLOUR LIMESTONE
INSTALLED ASHLAR

Human Nature® Collection | HN840



7619002 NICKEL



7619003 SLATE



7619004 LIMESTONE



7619006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	980 g/m² ± 5%
Pile Height	4.7 mm + 15% / - 10%
Total Thickness	9.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - EE9E3485
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.85 kg CO ₂ eq. /m²



PRODUCT HN840 COLOUR NICKEL INSTALLED ASHLAR


Human Nature® Collection | HN850




7615002 NICKEL



7615003 SLATE



7615004 LIMESTONE



7615006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1085 g/m² ± 5%
Pile Height	4.8 mm +15% / - 10%
Total Thickness	9.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	29 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 57ACB90F
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.16 kg CO ₂ eq. /m²





PRODUCT HN850 COLOUR SLATE INSTALLED ASHLAR

Hydropolis




4236008 MAGENTA 4236009 TANGERINE 4236010 OCEAN 4236011 EMERALD 4236012 COBALT

Backing	CQuest™Bio
Product Definition	Tufted Patterned Textured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	795 g/m² ± 5%
Pile Height	3.6 mm +15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4FE2973F
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.61 kg CO ₂ eq./m²



CARPET PRODUCT HYDROPOLIS COLOUR COBALT INSTALLED NON DIRECTIONAL
LVT PRODUCT NATURAL WOODGRAINS COLOUR SAND DUNE INSTALLED ASHLAR

Ice Breaker

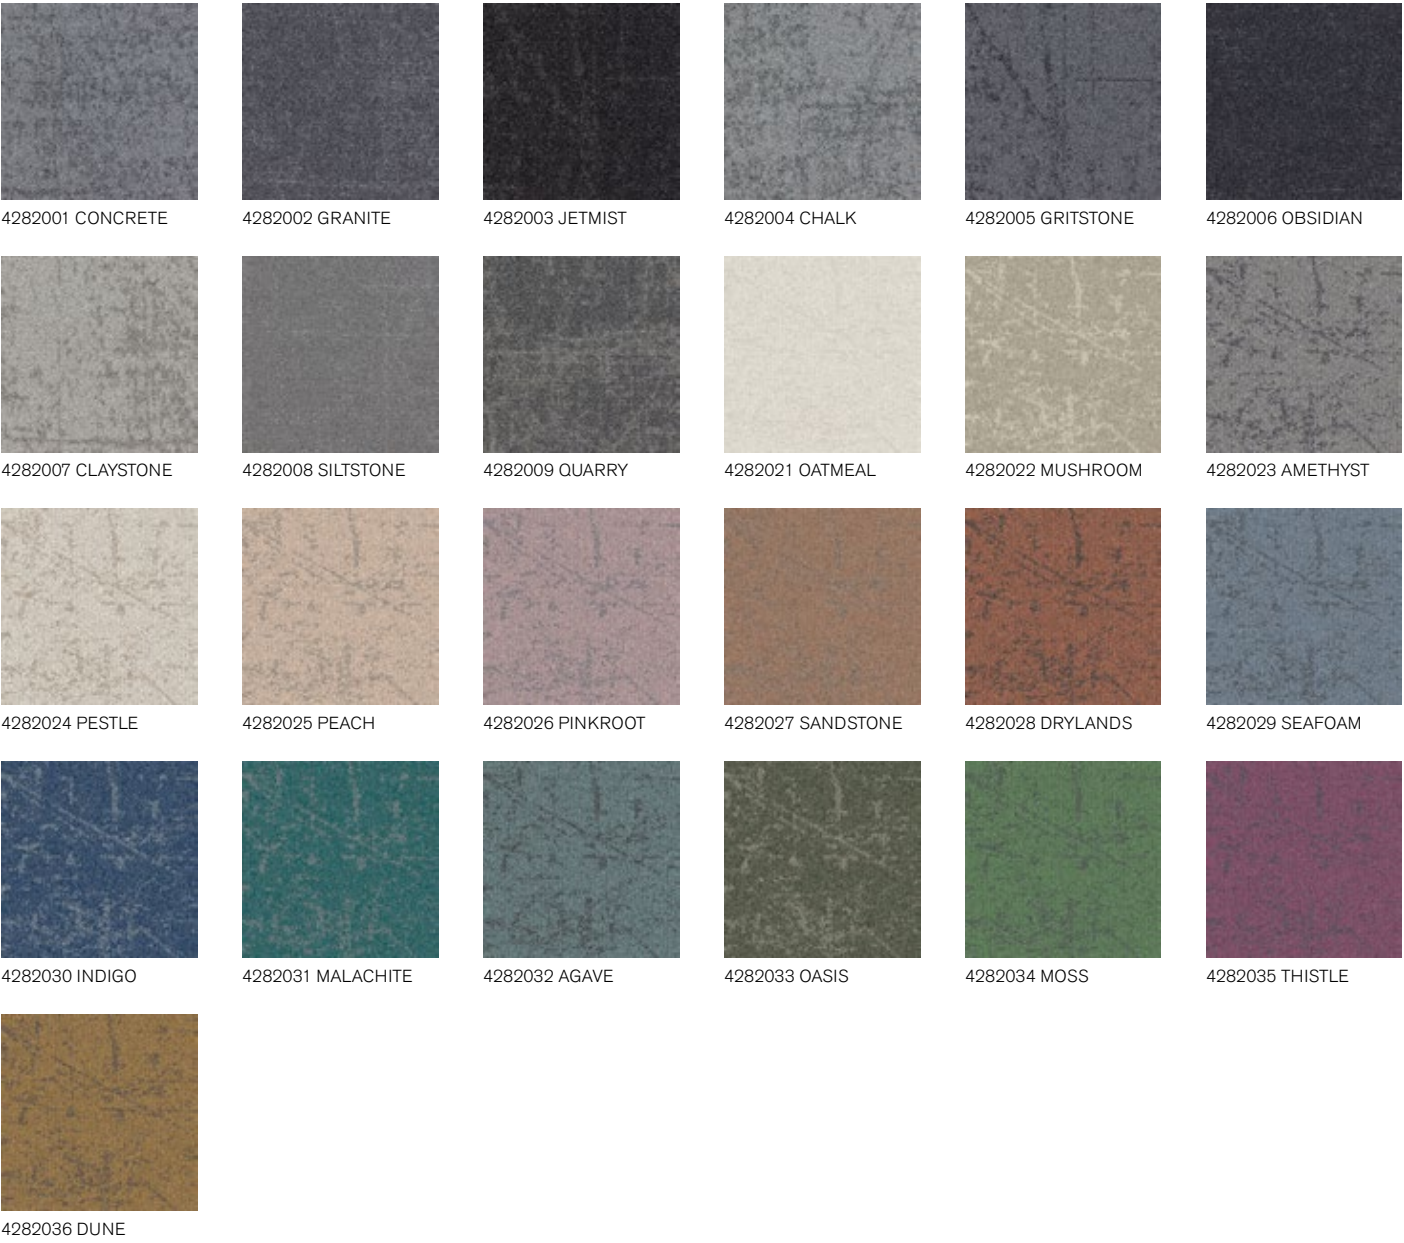


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	616 g/m² ± 5%
Pile Height	3.7 mm +15% / - 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 7B65BA08
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	4.48 kg CO ₂ eq. /m²



PRODUCT ICE BREAKER COLOUR PEACH INSTALLED NON DIRECTIONAL

Look Both Ways Collection | Step Aside

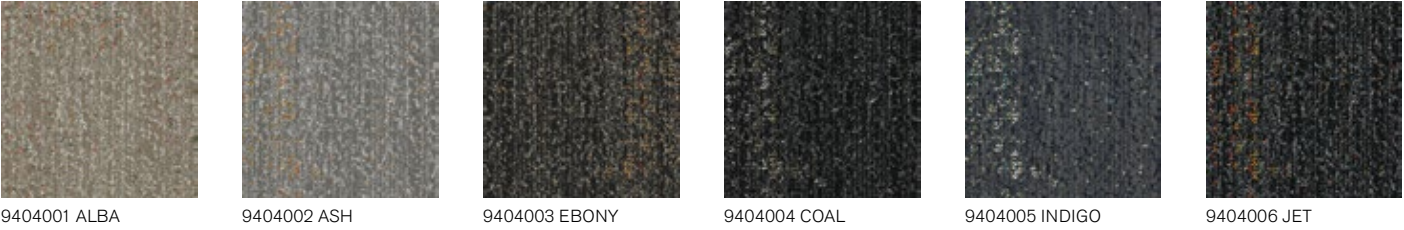


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	882 g/m² ± 5%
Pile Height	3.4 mm + 15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C5EFAF05
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²




PRODUCT STEP ASIDE COLOUR COAL INSTALLED ASHLAR

Look Both Ways Collection | Step in Time





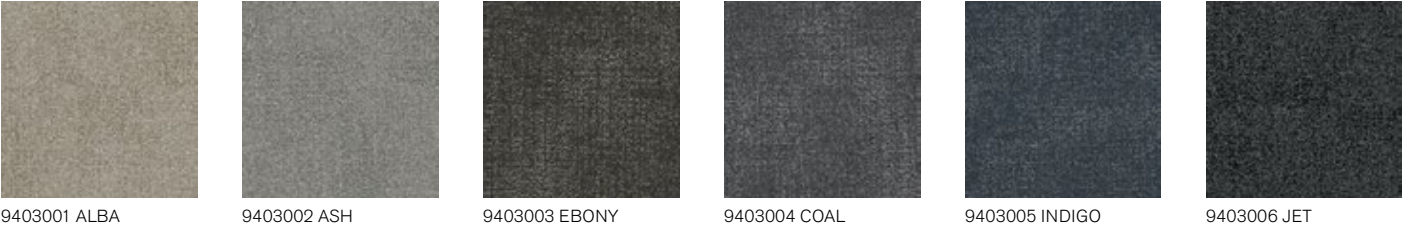


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	848 g/m ² ± 5%
Pile Height	3.1 mm + 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B43EAC3E
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.43 kg CO ₂ eq. /m ²




PRODUCT STEP IN TIME COLOUR ASH INSTALLED MONOLITHIC

Look Both Ways Collection | Step it Up


					
9406001 ALBA	9406002 CORALITE	9406003 ASH	9406004 CITRINE	9406005 EBONY	9406006 SIENNA
					
9406007 COAL	9406008 SLATE	9406009 INDIGO	9406010 AZURE	9406011 JET	9406012 JADE
					
9406200 ARCTIC	9406201 SAGE	9406202 CONCRETE	9406203 STEEL	9406204 COCOA	9406205 PEWTER
					
9406206 MINK	9406207 WHEAT	9406208 MUSTARD	9406209 TERRACOTTA	9406210 WINE	9406211 ROYAL
					
9406212 DENIM	9406213 FERN				

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	3.0 mm + 15% / - 10%
Total Thickness	6.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - F24DC73E
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	2.69 kg CO ₂ eq. /m²




PRODUCT STEP IT UP COLOUR STEEL INSTALLED BRICK

Look Both Ways Collection | Step this Way

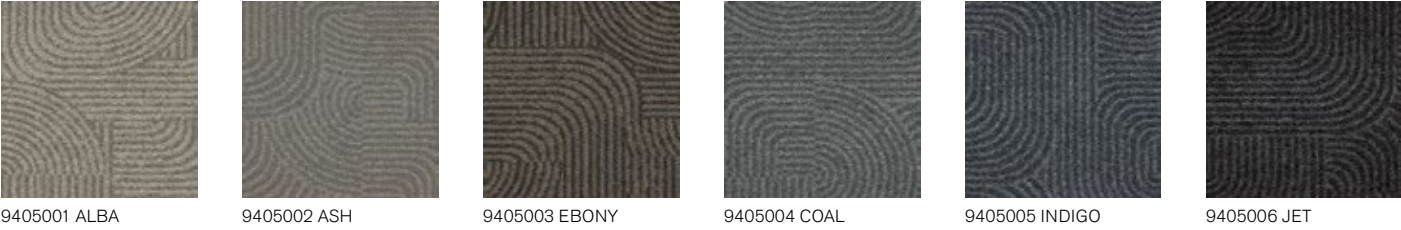

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m ² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3A3DAE09
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.33 kg CO ₂ eq. /m ²



PRODUCT STEP THIS WAY COLOUR INDIGO INSTALLED BRICK

Luxury Collection LC02



2369001 INK



2369002 WALNUT



2369003 FAWN



2369004 CLOUD

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1449 g/m² ± 5%
Pile Height	6.4 mm + 15% / - 10%
Total Thickness	9.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 9CDF95FC
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	5.33 kg CO ₂ eq. /m²




CARPET PRODUCT LUXURY COLLECTION LC02 COLOUR FAWN INSTALLED NON DIRECTIONAL
LVT PRODUCT NATURAL WOODGRAINS COLOUR BEECH INSTALLED ASHLAR

Luxury Collection LC05




2377001 SILVER 2377002 MINT 2377003 HAZEL 2377004 PEACOCK 2377005 AQUA

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1319 g/m² ± 5%
Pile Height	5.7 mm +15% / - 10%
Total Thickness	9.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4F7AC8A3
Packaging	3m²
Carbon Footprint (cradle-to-gate)	4.99 kg CO ₂ eq. /m²




PRODUCT LUXURY COLLECTION LC05 COLOUR PEACOCK INSTALLED NON DIRECTIONAL

Mod Café

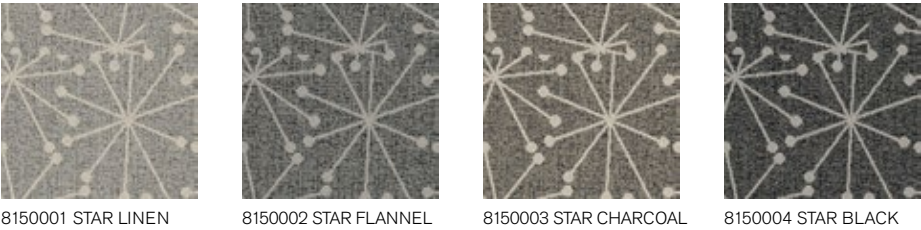

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1011 g/m² ± 5%
Pile Height	4.1 mm +15% / - 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 5E83259A
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.95 kg CO ₂ eq. /m²




PRODUCT MOD CAFÉ COLOUR STAR BLACK INSTALLED MONOLITHIC
PRODUCT WW880 COLOUR BLACK LOOM INSTALLED ASHLAR

Net Effect® Collection


B601



B602

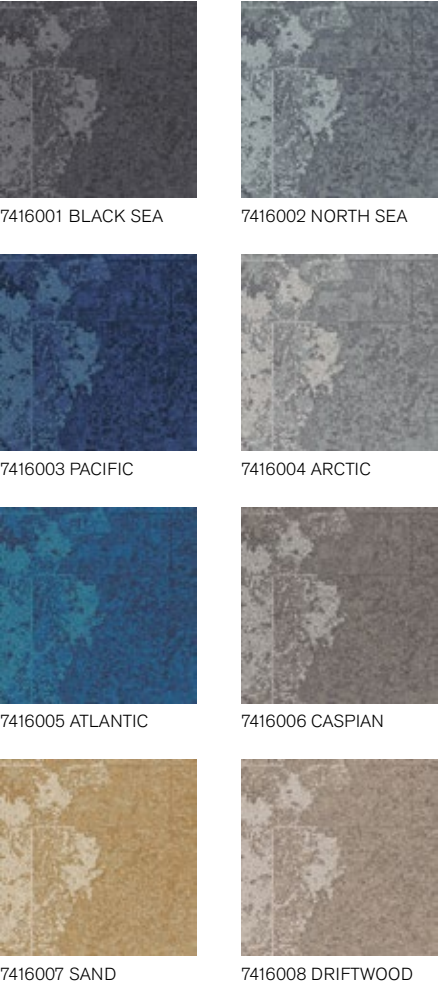

B603

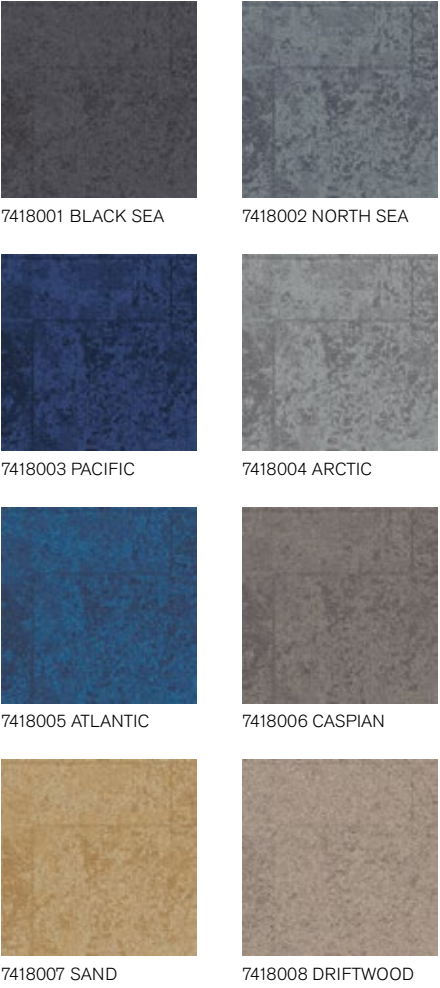

Backing	CQuest™Bio				
Product Definition	Tapestry Tufted Patterned Structured Loop Pile				
Pile Material	100% Recycled Solution Dyed Nylon				
Pile Yarn Weight	B601 950	B602 882	B603 780	g/m² ± 5%	
Pile Height	B601 4.4	B602 3.9	B603 2.9	mm + 15% / - 10%	
Total Thickness	B601 9.3	B602 9.0	B603 7.3	mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2				
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)				
Castor Chair	≥ 2.4 (EN 985)				
Impact Sound Insulation (ΔL _w)	α _w 0.20 (EN ISO 11654)				
Sound Absorption	26 dB (EN ISO 10140-3)				
Indoor Air Quality	B601 67C6F50F	B602 0291DBB3	B603 1A4E2B2A	GUT PRODIS	
Packaging	B601 3	B602 4	B603 4	m²	
Carbon Footprint (cradle-to-gate)	B601 3.74	B602 3.53	B603 3.22	kg CO ₂ eq. /m²	

NON DIRECTIONAL

CERTIFIED

cradle to cradle

SILVER

100%
Recycled Nylon









NON DIRECTIONAL



PRODUCTS B601, B602 & B603 COLOUR ATLANTIC INSTALLED DESIGN BY TILE

New Horizons II

					
4117002 WHEAT	4117003 OAK	4117004 NOUGAT	4117005 CHAMELEON	4117006 PEBBLES	4117007 ASH
					
4117008 SILVER	4117009 PLATIN	4117010 CARBON	4117011 SKY	4117012 MARINE	4117013 AMARYLLIS
					
4117014 STEEL	4117015 COBALT	4117016 NAVY	4117017 PETROL	4117018 PALM	4117019 WINDSOR

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Nylon
Pile Yarn Weight	550 g/m² ± 5%
Pile Height	2.3 mm + 15% / - 10%
Total Thickness	5.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A3CFD1C0
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	6.57 kg CO ₂ eq. /m²




PRODUCT NEW HORIZONS II COLOUR CARBON INSTALLED MONOLITHIC

NY+LON Streets Collection | Broome Street



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	949 g/m² ± 5%
Pile Height	3.7 mm + 15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 08E9ABC0
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²




PRODUCT BROOME STREET COLOUR YELLOW GLASS
PRODUCT WHEELER STREET COLOUR IRON SQUARE
INSTALLED MONOLITHIC

NY+LON Streets Collection | Dover Street



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m² ± 5%
Pile Height	2.7 mm + 15% / - 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 08E9ABC0
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²



PRODUCT DOVER STREET COLOUR CONCRETE DOT INSTALLED MONOLITHIC

NY+LON Streets Collection | Mercer Street



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	7.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DFA56BE2
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq. /m²




PRODUCT MERCER STREET COLOUR BROWN CIRCLE INSTALLED MONOLITHIC

NY+LON Streets Collection | Old Street



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2.8 mm + 15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 027A18F2
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2.69 kg CO ₂ eq. /m²



PRODUCT OLD STREET COLOURS CONCRETE GRID & METAL GRID INSTALLED MONOLITHIC

NY+LON Streets Collection | Reade Street




Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m² ± 5%
Pile Height	3.4 mm +15% / - 10%
Total Thickness	7.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CC60E83A
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.33 kg CO ₂ eq. /m²




PRODUCT READE STREET COLOUR IRON PLATE INSTALLED MONOLITHIC

NY+LON Streets Collection | Wheler Street

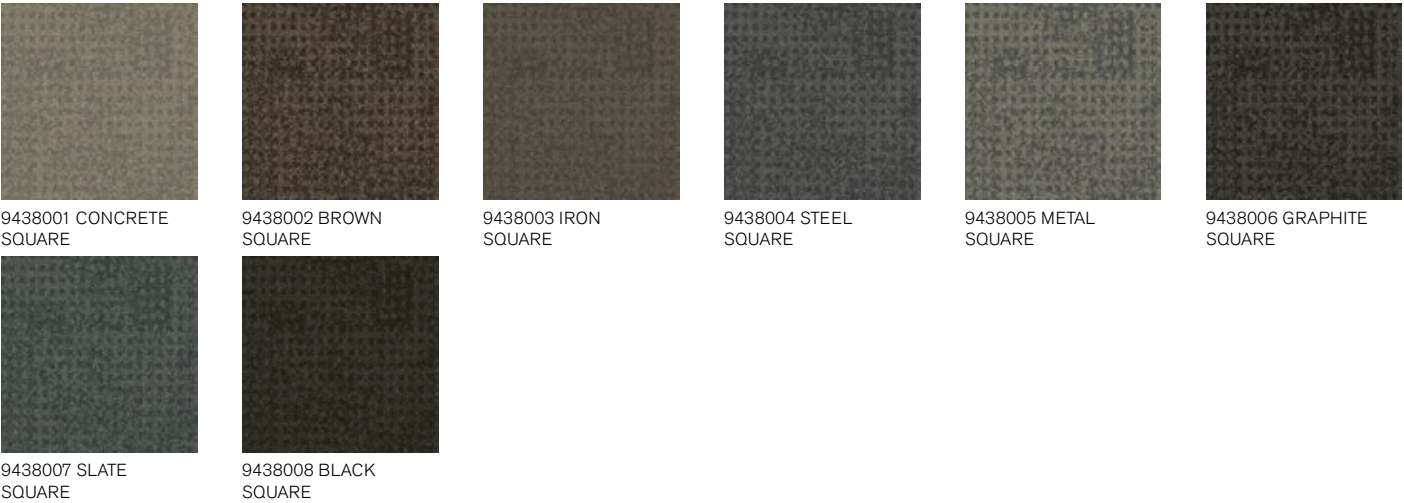

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	644 g/m² ± 5%
Pile Height	3.2 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 083CE1DD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	2.80 kg CO ₂ eq. /m²



PRODUCT WHELER STREET COLOUR SLATE SQUARE INSTALLED MONOLITHIC



7559001 MUSHROOM/BISCUIT



7559004 SAGE/CANARY




7559007 PEPPER/CLOUD



7559002 MUSHROOM/MUSTARD



7559005 PEWTER/CLOUD



7559008 PEPPER/LIME




7559003 SAGE/BISCUIT



7559006 PEWTER/MANDARIN

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	718 g/m² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) Bfl s1 on request
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 21A66C49
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.41 kg CO ₂ eq. /m²



PRODUCT OFF LINE COLOURS PEWTER/MANDARIN & PEWTER/CLOUD
PRODUCT ON LINE COLOUR PEWTER INSTALLED HERRINGBONE



7335001 BISCUIT




7335004 SAGE



7335007 PEWTER



7335010 LIME



7335017 FOREST



7335020 POPPY




7335023 SABLE



7335026 AQUAMARINE




7335002 MUSHROOM



7335005 CANARY



7335008 MANDARIN



7335015 TOPAZ



7335018 AZURE



7335021 DUNE



7335024 GRANITE



7335027 COBALT



7335003 MUSTARD



7335006 CLOUD




7335009 PEPPER



7335016 INK



7335019 LAPIS



7335022 TITANIUM




7335025 PIGEON



7335028 MAGENTA

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	718 g/m² ± 5%
Pile Height	3.7 mm + 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) Bfl s1 on request
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - AA41B44F
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.41 kg CO ₂ eq. /m²



PRODUCT ON LINE COLOURS CLOUD, LAPIS & PEPPER INSTALLED ASHLAR

Open Air Collection | Open Air 401



9628001 BLACK



9628004 CHARCOAL



9628007 GRANITE



9628002 IRON



9628005 NATURAL



9628008 STONE



9628003 FLANNEL




9628006 NICKEL



9628009 LINEN

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2.7 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 5EF783A7
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²



PRODUCT OPEN AIR 401 COLOUR STONE
PRODUCT WORLD WOVEN WW895 COLOUR LOOH WEAVE
INSTALLED ASHLAR

Open Air Collection | Open Air 402



9624001 BLACK



9624004 CHARCOAL



9624007 GRANITE



9624002 IRON



9624005 NATURAL



9624008 STONE



9624003 FLANNEL




9624006 NICKEL



9624009 LINEN

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2.9 mm + 15% / - 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 04DB42A4
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²



PRODUCT OPEN AIR 402 COLOURS GRANITE & STONE INSTALLED ASHLAR

Open Air Collection | Open Air 403



Backing	CQuest™Bio	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2.6 mm + 15% / - 10%	
Total Thickness	6.7 mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2.4 (EN 985)	
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0.20 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS - CF2DBE98	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²	



PRODUCT OPEN AIR 403 COLOUR NICKEL INSTALLED NON DIRECTIONAL

Open Air Collection | Open Air 403 Accent



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2.6 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CF2DBE98
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²




PRODUCT OPEN AIR 403 ACCENT COLOUR COBALT
PRODUCT OPEN AIR 403 COLOUR NICKEL
PRODUCT OPEN AIR 403 TRANSITION COLOUR NICKEL COBALT
INSTALLED NON DIRECTIONAL
INSTALLED DESIGN BY TILE

Open Air Collection | Open Air 403 Transition




Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2.9 mm +15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - F0C6CC91
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²



PRODUCT OPEN AIR 403 · TRANSITION · COLOUR NICKEL/MOSS · INSTALLED DESIGN BY TILE
PRODUCT OPEN AIR 403 · ACCENT · COLOUR MOSS
PRODUCT OPEN AIR 403 · COLOUR NICKEL · INSTALLED NON DIRECTIONAL

Open Air Collection | Open Air 404



Backing	CQuest™Bio	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2.6 mm +15% / - 10%	
Total Thickness	6.7 mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2.4 (EN 985)	
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0.20 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS - DA45FBB8	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²	



PRODUCT OPEN AIR 404 COLOUR NICKEL INSTALLED NON DIRECTIONAL

Open Air Collection | Open Air 404 Accent



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2.6 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DA45FBB8
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²



PRODUCT OPEN AIR 404 ACCENT COLOUR RUST
PRODUCT OPEN AIR 404 COLOUR NICKEL
PRODUCT OPEN AIR 404 TRANSITION COLOUR NICKEL/RUST
INSTALLED NON DIRECTIONAL
INSTALLED DESIGN BY TILE

Open Air Collection | Open Air 404 Transition



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2.9 mm + 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - AFA1534A
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. /m²



PRODUCT OPEN AIR 404 TRANSITION · COLOUR NICKEL/CLEMENTINE · INSTALLED DESIGN BY TILE
PRODUCT OPEN AIR 404 · COLOUR NICKEL · INSTALLED NON DIRECTIONAL

Open Air Collection | Open Air 405



Backing	CQuest™Bio	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2.9 mm +15% / - 10%	
Total Thickness	6.7 mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2.4 (EN 985)	
Impact Sound Insulation (ΔLw)	23 dB (EN ISO 10140-3)	
Sound Absorption	αw 0.20 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS - 493B7CE1	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3.13 kg CO₂ eq. /m²	



PRODUCT OPEN AIR 405 COLOUR CHARCOAL INSTALLED NON DIRECTIONAL

Overedge



9271001 B&W OVEREDGE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Shag Cut Tile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1424 g/m² ± 5%
Pile Height	8.9 mm + 15% / - 10%
Total Thickness	11.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	30 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 150D9A1B
Packaging	2.5 m²
Carbon Footprint (cradle-to-gate)	5.21 kg CO ₂ eq. /m²



PRODUCT OVEREDGE COLOUR B&W OVEREDGE INSTALLED HERRINGBONE

Past Forward Collection | Antiquities




9961001 CRIMSON 9961002 JADE 9961003 CORAL 9961004 AMBER

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	949 g/m² ± 5%
Pile Height	3.7 mm + 15% / - 10%
Total Thickness	8.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FB3DEB0B
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²




CARPET PRODUCT ANTIQUITIES COLOUR AMBER INSTALLED NON DIRECTIONAL
LVT PRODUCT TEXTURED WOODGRAINS COLOUR RUSTIC OAK INSTALLED ASHLAR

Past Forward Collection | Archival

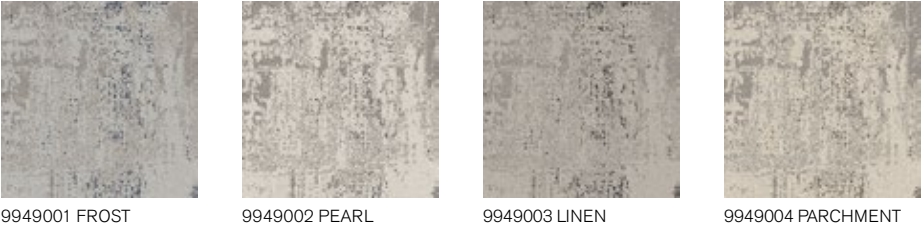

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1323 g/m² ± 5%
Pile Height	5.3 mm +15% / - 10%
Total Thickness	10.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3CD16BB8
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.99 kg CO ₂ eq. /m²



Past Forward Collection | Arley



9959001 AZURE 9959002 BASIL 9959003 LICHEN 9959004 WALNUT

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	949 g/m² ± 5%
Pile Height	3.5 mm + 15% / - 10%
Total Thickness	8.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 8CB94D76
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²




CARPET PRODUCT ARLEY COLOUR WALNUT INSTALLED NON DIRECTIONAL
LVT PRODUCT NORTHERN GRAIN COLOUR ANTIQUE WASH INSTALLED ASHLAR

Past Forward Collection | Cheshire Street




9955001 COBALT 9955002 MIDNIGHT 9955003 TAUPE 9955004 DUNE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m² ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - F0747AEC
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.95 kg CO ₂ eq. /m²




PRODUCT CHESHIRE STREET COLOUR COBALT INSTALLED NON DIRECTIONAL

Past Forward Collection | Circa Then

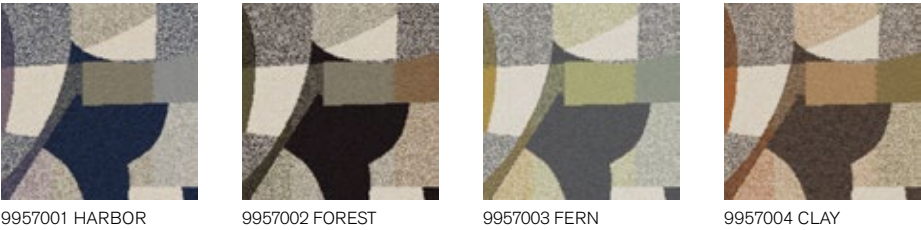

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	949 g/m² ± 5%
Pile Height	4.0 mm + 15% / - 10%
Total Thickness	8.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 05CD9EE2
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. /m²



PRODUCT CIRCA THEN COLOUR CLAY INSTALLED NON DIRECTIONAL

Past Forward Collection | Decades



9950001 DENIM



9950002 EBONY



9950003 SLATE




9950004 MOCHA

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1220 g/m² ± 5%
Pile Height	5.0 mm +15% / - 10%
Total Thickness	10.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 05CD9EE2
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.58 kg CO ₂ eq. /m²



CARPET PRODUCT DECADES COLOUR EBONY INSTALLED MONOLITHIC
RUBBER PRODUCT NORAMENT® 926 CASTELLO COLOUR 5356

Past Forward Collection | Fortnight

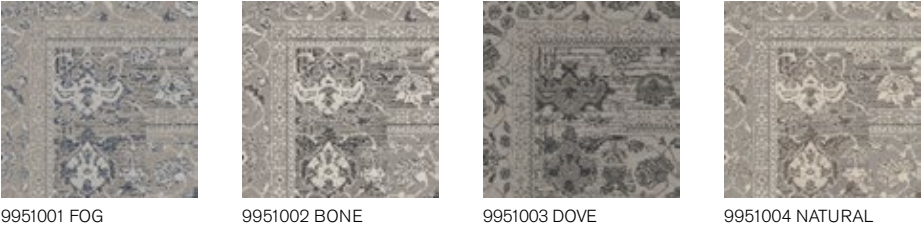


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1220 g/m² ± 5%
Pile Height	3.7 mm +15% / - 10%
Total Thickness	8.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 2499AD6C
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.58 kg CO ₂ eq. /m²



PRODUCT FORTNIGHT COLOUR BONE INSTALLED NON DIRECTIONAL

Past Forward Collection | Newstalgia

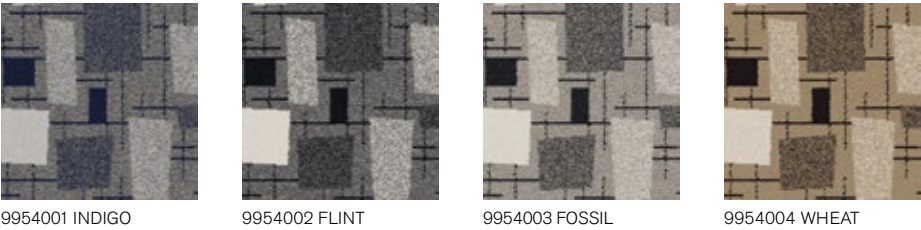

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m² ± 5%
Pile Height	3.8 mm +15% / - 10%
Total Thickness	8.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 9D36402D
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.64 kg CO ₂ eq. /m²



PRODUCT NEWSTALGIA COLOUR WHEAT INSTALLED MONOLITHIC

Past Forward Collection | Reeling



9962001 SAPHIRE



9962002 PEBBLE



9962003 AVOCADO



9962004 SPICE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m² ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	8.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 9D36402D
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m²



HIGH DIRECTIONAL



LVT PRODUCT TEXTURED STONES CARPET PRODUCT REELING COLOUR SAPHIRE
COLOUR COOL POLISHED CEMENT INSTALLED MONOLITHIC

Past Forward Collection | Rekindled



9956001 STEEL

9956002 SAGE

9956003 ASH

9956004 SAND

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m² ± 5%
Pile Height	4.6 mm +15% / - 10%
Total Thickness	9.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FBA6F811
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.37 kg CO ₂ eq. /m²



PRODUCT REKINDLED COLOUR SAND INSTALLED NON DIRECTIONAL

Past Forward Collection | Retrospec



9958001 ROYAL



9958002 OLIVE



9958003 EMERALD



9958004 TERRACOTTA

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m² ± 5%
Pile Height	3.9 mm +15% / - 10%
Total Thickness	8.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CCACB47C
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.64 kg CO ₂ eq. /m²




NON DIRECTIONAL



PRODUCT RETROSPEC COLOUR OLIVE INSTALLED NON DIRECTIONAL
PRODUCT OPEN AIR 402 COLOUR NATURAL INSTALLED ASHLAR

Past Forward Collection | Unspooled

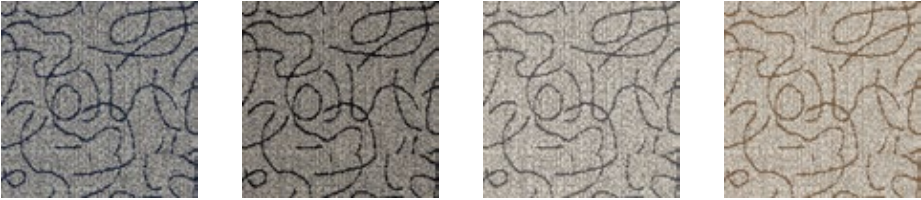


9953001 PEWTER 9953002 GRAPHITE 9953003 OYSTER 9953004 OATMEAL

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1119 g/m² ± 5%
Pile Height	4.8 mm + 15% / - 10%
Total Thickness	9.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B0184B87
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.27 kg CO ₂ eq. /m²



PRODUCT UNSPOOLED COLOUR GRAPHITE INSTALLED MONOLITHIC

Past Forward Collection | Unwound

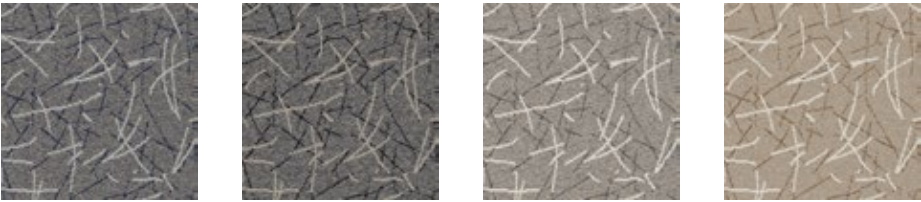

9952001 TWILIGHT

9952002 CARBON

9952003 NICKEL

9952004 CAMEL

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	848 g/m² ± 5%
Pile Height	4.4 mm + 15% / - 10%
Total Thickness	9.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - F66CF8EE
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.43 kg CO ₂ eq. /m²



PRODUCT UNWOUND COLOUR TWILIGHT INSTALLED MONOLITHIC

Past Forward Collection | Yesterdays





9960001 PRUSSIAN 9960002 ONYX 9960003 FLANNEL 9960004 BRONZE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	848 g/m² ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - AAB4B4FD
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.43 kg CO ₂ eq. /m²



PRODUCT YESTERDAYS COLOUR FLANNEL INSTALLED NON DIRECTIONAL

Polichrome Solid




					
4266001 METAL	4266002 MOUSEY	4266003 CLOUDBURST	4266004 LIQUORICE	4266005 SILK GREY	4266006 CINDER
					
4266007 SHIITAKE	4266008 MOLE	4266009 WATERFALL	4266010 DISTANT	4266011 DAPHNE	4266012 PERIDOT
					
4266013 COLUMBIA	4266014 POWDERBLUE	4266015 BLUE NIGHTS	4266016 DAIQUIRI	4266017 TURTLEDOVE	4266018 MIMOSA
					
4266019 BUBBLEGUM	4266020 VIOLA	4266021 MARZIPAN	4266022 CARROT	4266023 GRENADINE	4266024 MALVA

Backing	CQuest™Bio
Product Definition	Tufted Frieze Cut Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	1215 g/m² ± 5%
Pile Height	4.0 mm + 15% / - 10%
Total Thickness	7.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 5E13D099
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.72 kg CO ₂ eq. /m²



PRODUCT POLICHROME SOLID COLOUR TURTLEDOVE
PRODUCT POLICHROME STIPPLE COLOUR LINEN INSTALLED MONOLITHIC

Polichrome Stipple

					
4265001 DRIZZLE	4265002 DOLPHIN	4265003 CAVIAR	4265004 JAVA	4265005 MOONROCK	4265006 SMOKY PEARL
					
4265007 HEMP	4265008 PEAT	4265009 ALHAMBRA	4265010 NIAGARA	4265011 LOBELIA	4265012 HERBAL
					
4265013 EVERGLADE	4265014 INFINITY	4265015 MAZARINE	4265016 CACTUS	4265017 LINEN	4265018 BUTTERCUP
					
4265019 ROSEBUD	4265020 TULIP	4265021 HAZEL	4265022 NECTARINE	4265023 LOLLIPOP	4265024 MULBERRY

Backing	CQuest™Bio
Product Definition	Tufted Frieze Cut Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	1100 g/m² ± 5%
Pile Height	4.2 mm + 15% / - 10%
Total Thickness	7.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6E98BDBB
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.51 kg CO ₂ eq. /m²



PRODUCT POLICHROME STIPPLE COLOUR DOLPHIN
PRODUCT POLICHROME SOLID COLOUR MOUSEY INSTALLED MONOLITHIC

Portmanteau PM19



7968001 ROSEWOOD



7968002 COBALT



7968003 BERRY



7968004 HONEY



7968005 EBONY & IVORY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1034 g/m² ± 5%
Pile Height	5.7 mm +15% / - 10%
Total Thickness	9.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6E7BD9D4
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.24 kg CO ₂ eq. /m²



CARPET PRODUCT PORTMANTEAU PM19 COLOUR EBONY & IVORY
LVT PRODUCT TEXTURED WOODGRAINS COLOUR SILVER DUNE INSTALLED ASHLAR

Portmanteau PM39



8063001 EBONY & IVORY



8063002 BUTTERSCOTCH



8063003 PISTACHIO



8063004 SAGE




8063005 DENIM

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1034 g/m² ± 5%
Pile Height	5.1 mm +15% / - 10%
Total Thickness	9.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6E7BD9D4
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.24 kg CO ₂ eq. /m²



PRODUCT PORTMANTEAU PM39 COLOUR DENIM INSTALLED ASHLAR

Portmanteau PM49

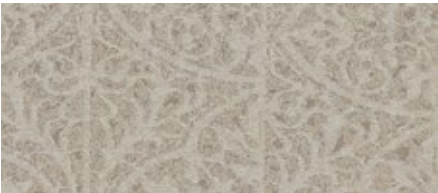

8064001 ECRU



8064002 GARDEN STONE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1034 g/m² ± 5%
Pile Height	5.4 mm +15% / - 10%
Total Thickness	9.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6E7BD9D4
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.24 kg CO ₂ eq. /m²



PRODUCT PORTMANTEAU PM49 COLOUR GARDEN STONE INSTALLED ASHLAR

Recreation



4313001 CREATE



4313002 SKETCH



4313003 INVENTION



4313004 CONCEPT



4313005 FORMATION



4313006 FOUNDATION



4313007 CONSTRUCTION



4313008 DIRECTION



4313009 INSPIRED



4313010 SKILL




4313011 DRAW




4313012 ARTISTIC



4313013 DEVELOP



4313014 EXPRESS



4313015 TALENT



4313016 GRAPHIC

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	583 g/m² ± 5%
Pile Height	2.8 mm + 15% / - 10%
Total Thickness	6.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FBEF290B
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.06 kg CO ₂ eq. /m²





Carbon Negative with CQuest™ BioX backing option



100% Recycled Nylon



PRODUCT RECREATION COLOUR INVENTION INSTALLED NON DIRECTIONAL

RMS 607




7179001 PEWTER 7179002 TITANIUM 7179003 IVORY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	832 g/m² ± 5%
Pile Height	4.1 mm + 15% / - 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 272A4A4D
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.71 kg CO ₂ eq. /m²



CARPET PRODUCT RMS 607 COLOUR IVORY INSTALLED NON DIRECTIONAL
PRODUCT TEXTURED WOODGRAINS COLOUR ANTIQUE LIGHT OAK INSTALLED ASHLAR

Sampa

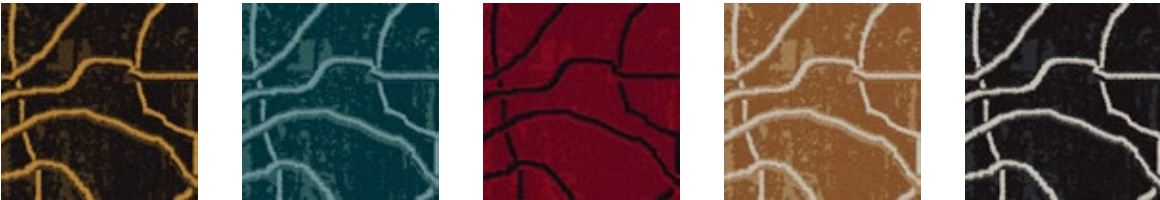

8192001 ANZAC 8192002 TROPIC 8192003 BRICK 8192004 UMBER 8192005 COAL

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1228 g/m² ± 5%
Pile Height	5.2 mm +15% / - 10%
Total Thickness	9.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - D00BC59B
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.75 kg CO ₂ eq. /m²



PRODUCT SAMPA COLOUR ANZAC INSTALLED MONOLITHIC

Superflor II



4308001 SIBERIAN FROST II



4308002 GREY II



4308003 RAVEN II




4308004 MID BROWN II



4308005 BUFFALO II



4308006 OCEANUS II



4308007 SEVILLE PASSION II



4308008 IRISH COFFEE II



4308009 YIPPEE II



4308010 PRIMAVERA II

Backing	CQuest™Bio
Product Definition	Coarse Fibre Needlefelt Pile
Pile Material	70% Solution Dyed Nylon, 20% Polyester, 10% Polypropylene
Pile Yarn Weight	521 g/m² ± 5%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	22 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 68A7A3CA
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	6.11 kg CO ₂ eq. /m²



PRODUCT SUPERFLOR II COLOURS PRIMAVERA II & IRISH COFFEE II INSTALLED MONOLITHIC

The Scandinavian Collection

					
1543001 BERGEN	1543002 HELSINKI	1543003 REYKJAVIK	1543004 STOCKHOLM	1543006 MALMO	1543012 COPENHAGEN
					
1543013 NORDKAPP	1543016 HEKLA	1543033 VISBY	1543034 TORSHAVN	1543035 NARVIK	1543036 KIRKENES

Backing	CQuest™Bio
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	400 g/m² ± 5%
Total Thickness	4.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 99C6AF1E
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.35 kg CO ₂ eq./m²



PRODUCT THE SCANDINAVIAN COLLECTION COLOUR MALMO INSTALLED QUARTER TURN

Touch & Tones II Collection | Touch & Tones II 101



Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	700 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - F0C9A15F
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.76 kg CO ₂ eq. /m²




CARPET PRODUCT TOUCH & TONES II 101 COLOUR TERRACOTTA
CARPET PRODUCT TOUCH & TONES II 102 COLOUR TERRACOTTA INSTALLED MONOLITHIC
LVT PRODUCT BRUSHED LINES COLOUR SANDALWOOD INSTALLED ASHLAR



Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	925 g/m² ± 5%
Pile Height	4.9 mm + 15% / - 10%
Total Thickness	8.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 1D5ABBA8
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.18 kg CO ₂ eq./m²



PRODUCT TOUCH & TONES II 101 COLOUR FOREST
PRODUCT TOUCH & TONES II 102 COLOUR FOREST INSTALLED MONOLITHIC

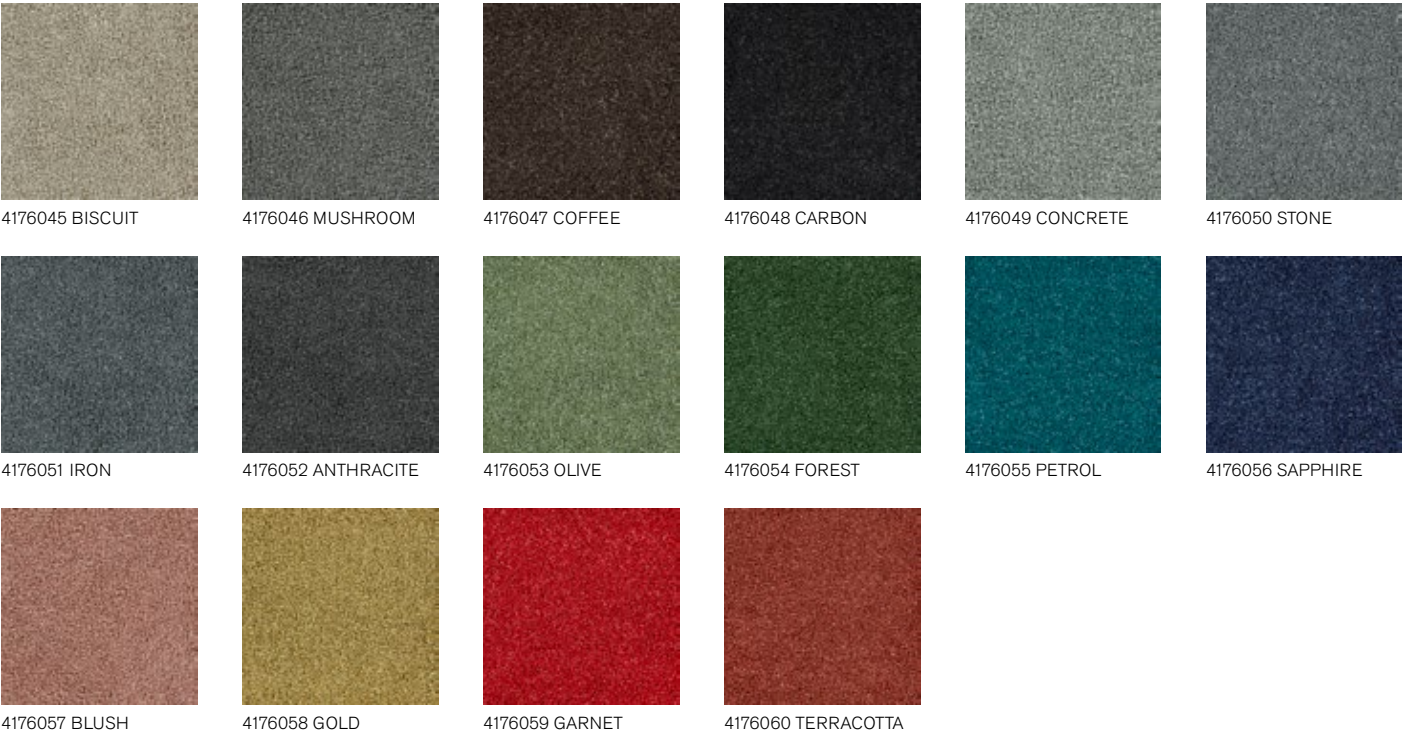

Backing	CQuest™Bio
Product Definition	Tufted Plain Shag Cut Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	1136 g/m² ± 5%
Pile Height	7.1 mm +15% / - 10%
Total Thickness	10.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4A32FB0D
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.58 kg CO ₂ eq. /m²



CARPET PRODUCT TOUCH & TONES II 103 COLOUR BLUSH INSTALLED MONOLITHIC
LVT PRODUCT TEXTURED STONES COLOUR DISTRESSED CONCRETE INSTALLED MONOLITHIC

Touch of Timber



4191001 Balsa



4191004 Elm



4191007 Maple



4191010 Olive



4191002 Bamboo



4191005 Silver Birch



4191008 Sycamore



4191011 Walnut



4191003 Oak



4191006 Ash




4191009 Blue Spruce





4191012 Blackwood

Backing	CQuest™Bio
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	499 g/m² ± 5%
Total Thickness	5.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B17332B6
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2.84 kg CO ₂ eq. /m²



PRODUCT TOUCH OF TIMBER COLOUR BLUE SPRUCE INSTALLED HERRINGBOINE

Transformation

					
1628068 OATMEAL	1628069 MANILLA	1628063 SHELL	1628004 MEADOW	1628019 WADI	1628064 CLAY
					
1628014 DESERT	1628029 PLANTATION	1628013 STEPPE	1628070 PARCHMENT	1628075 TRUFFLE	1628066 PEWTER
					
1628011 RIVER	1628072 SAXON	1628065 GABBRO	1628073 BARING	1628010 FERN	1628020 AMAZON
					
1628067 NIGHTSHADE	1628074 AZURE	1628024 LAVA	1628016 TROPICS	1628026 MOORLAND	1628025 PASTURE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	576 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 193E33DD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.27 kg CO ₂ eq./m²



PRODUCT TRANSFORMATION COLOUR MANILLA INSTALLED NON DIRECTIONAL


Upon Common Ground Collection | Dry Bark



2529001 DESERT NEUTRAL



2529004 SALTWATER DEPTH




2529007 FRESHWATER NEUTRAL




2529010 SPINIFEX GRASS



2529002 DESERT SANDS



2529005 RAINFOREST NEUTRAL



2529008 FRESHWATER GORGE



2529003 SALTWATER NEUTRAL



2529006 RAINFOREST CANOPY







2529009 SPINIFEX NEUTRAL

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	7.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - F3CBFACD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.57 kg CO ₂ eq. /m²




PRODUCT DRY BARK COLOUR FRESHWATER NEUTRAL INSTALLED ASHLAR

Upon Common Ground Collection | Escarpment

					
2525001 DESERT SHRUB	2525002 DESERT SANDS	2525003 DESERT NEUTRAL	2525004 SALTWATER DEPTH	2525005 SALTWATER CLIFF	2525006 SALTWATER NEUTRAL
					
2525007 RAINFOREST FLOOR	2525008 RAINFOREST CANOPY	2525009 RAINFOREST NEUTRAL	2525010 FRESHWATER LOMANDRA	2525011 FRESHWATER GORGE	2525012 FRESHWATER NEUTRAL
					
2525013 SPINIFEX GRASS	2525014 SPINIFEX DIRT	2525015 SPINIFEX NEUTRAL			

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	644 g/m² ± 5%
Pile Height	3.5 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A48A58AE
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq. /m²



PRODUCT ESCARPMENT COLOURS FRESHWATER LOMANDRA & FRESHWATER GORGE INSTALLED ASHLAR

Upon Common Ground Collection | Sandbank



2528001 DESERT



2528002 SALTWATER



2528003 RAINFOREST



2528004 FRESHWATER



2528005 SPINIFEX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m² ± 5%
Pile Height	4.2 mm + 15% / - 10%
Total Thickness	9.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 1BADE087
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.19 kg CO ₂ eq. /m²



PRODUCT SANDBANK COLOUR RAINFOREST
PRODUCT UNDULATING WATER COLOUR RAINFOREST
INSTALLED ASHLAR

Upon Common Ground Collection | Shallows



2527001 DESERT



2527002 SALTWATER



2527003 RAINFOREST



2527004 FRESHWATER



2527005 SPINIFEX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m² ± 5%
Pile Height	4.0 mm + 15% / - 10%
Total Thickness	9.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FAAB03EC
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.55 kg CO ₂ eq. /m²



PRODUCT SHALLOWS COLOUR DESERT
PRODUCT UNDULATING WATER COLOUR DESERT
PRODUCT SANDBANK COLOUR DESERT
PRODUCT ESCARPMENT COLOUR DESERT SHRUB
INSTALLED ASHLAR

Upon Common Ground Collection | Undulating Water




2526001 DESERT



2526002 SALTWATER



2526003 RAINFOREST



2526004 FRESHWATER



2526005 SPINIFEX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m² ± 5%
Pile Height	4.3 mm + 15% / - 10%
Total Thickness	9.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 925D5534
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.55 kg CO ₂ eq. /m²



PRODUCT UNDULATING WATER COLOUR SALTWATER
PRODUCT SHALLOWS COLOUR SALTWATER
PRODUCT SANDBANK COLOUR SALTWATER
PRODUCT ESCARPMENT COLOUR SALTWATER NEUTRAL
PRODUCT DRY BARK COLOUR SALTWATER DEPTH INSTALLED ASHLAR

Urban Retreat® Collection

UR101



7148002 CHARCOAL/
LICHEN



7148004 GRANITE/
LICHEN



7148006 STONE/IVY



7148003 STRAW/GRASS



7148005 FLAX/GRASS



7148008 ASH/IVY

UR102



7146002 CHARCOAL



7146004 GRANITE



7146006 STONE



7146003 STRAW



7146005 FLAX



7146008 ASH

UR103



7150001 LICHEN



7150002 IVY



7150004 GRASS

Backing	CQuest™Bio				
Product Definition	Tapestry Tufted Patterned Structured Loop Pile				
Pile Material	100% Recycled Solution Dyed Nylon				
Pile Yarn Weight	UR101 851	UR102 863	UR103 857	g/m² ± 5%	
Pile Height	UR101 2.6	UR102 2.4	UR103 2.6	mm + 15% / - 10%	
Total Thickness	UR101 8.5	UR102 7.4	UR103 8.5	mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2				
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)				
Castor Chair	≥ 2.4 (EN 985)				
Impact Sound Insulation (ΔL _w)	α _w 0.20 (EN ISO 11654)				
Sound Absorption	26 dB (EN ISO 10140-3)				
Indoor Air Quality	UR101 9DAFEDDB	UR102 27F161F8	UR103 2F15A679		
Packaging	4m²				
Carbon Footprint (cradle-to-gate)	UR101 3.43	UR102 3.53	UR103 3.53	kg CO ₂ eq./m²	

NON DIRECTIONAL

QUARTER TURN


UR102 & UR103

CERTIFIED

cradle to cradle

SILVER

100% Recycled Nylon



UR102 &
UR103



PRODUCT UR101 COLOUR FLAX GRASS
PRODUCT UR102 COLOUR FLAX
PRODUCT UR103 COLOUR GRASS
INSTALLED DESIGN BY TILE

Works Collection | Works Effect



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	612 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A4C47888
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	7.16 kg CO ₂ eq. /m²



PRODUCT WORKS EFFECT | COLOUR CANYON | INSTALLED NON DIRECTIONAL


Works Collection | Works Element



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	602 g/m² ± 5%
Pile Height	3.2 mm + 15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C3DCA586
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	7.16 kg CO ₂ eq. /m²



PRODUCT WORKS ELEMENT COLOUR EBONY INSTALLED NON DIRECTIONAL

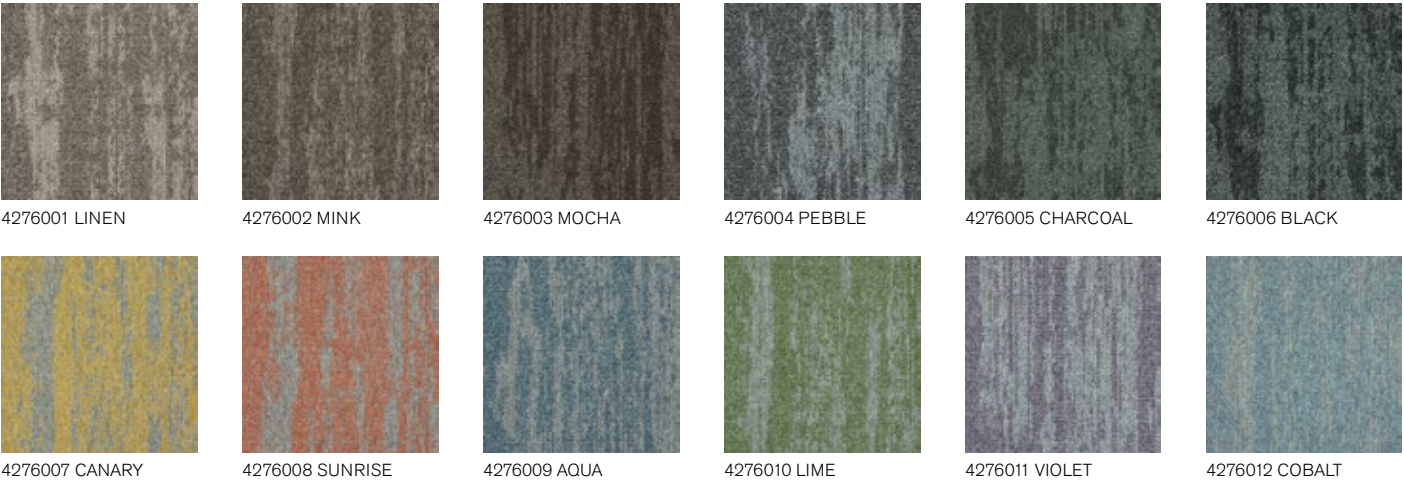

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	600 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - E945FCAB
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	7.05 kg CO ₂ eq. /m²



PRODUCT WORKS FLOW COLOUR LIME INSTALLED ASHLAR
PRODUCT TOUCH & TONES II COLOUR CONCRETE INSTALLED MONOLITHIC



4284001 NICKEL



4284004 SMOKE



4284007 PEARL



4284002 SLATE



4284005 ICE



4284008 COTTON



4284003 IRON



4284006 CLOUD


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	596 g/m² ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	7.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4BA80553
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	6.97kg CO ₂ eq. /m²



PRODUCT WORKS FREESTYLE COLOUR ICE INSTALLED ASHLAR



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	598 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 5C91CBDA
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	7.03 kg CO ₂ eq. /m²



PRODUCT WORKS SENSE COLOUR HONEY INSTALLED ASHLAR



8109001 LINEN TWEED



8109004 BLACK TWEED



8109007 RAFFIA TWEED



8109002 FLANNEL TWEED



8109005 BROWN TWEED



8109008 SISAL TWEED



8109003 CHARCOAL TWEED



8109006 NATURAL TWEED

Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	575 g/m² ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - EBA77B9F
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2.59 kg CO ₂ eq. /m²



PRODUCT WW860 COLOUR LINEN TWEED INSTALLED ASHLAR



8110001 HEATHER WARP




8110004 MOORLAND WARP



8110007 GLEN WARP



8110002 LOCH WARP



8110005 FUCHSIA WARP



8110008 DALE WARP



8110003 HIGHLAND WARP




8110006 AUTUMN WARP


Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	575 g/m² ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FECF9CFA
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2.59 kg CO ₂ eq. /m²



PRODUCT WW865 COLOUR AUTUMN WARP INSTALLED ASHLAR




8111001 LINEN WEFT



8111004 BLACK WEFT



8111007 RAFFIA WEFT




8111002 FLANNEL WEFT




8111005 BROWN WEFT



8111008 SISAL WEFT




8111003 CHARCOAL WEFT



8111006 NATURAL WEFT

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.1 mm + 15% / - 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - D4514D1D
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq. /m²



PRODUCT WW870 COLOURS FLANNEL WEFT & LINEN WEFT INSTALLED DESIGN BY TILE

World Woven® Collection | WW880



8112001 LINEN LOOM



8112004 BLACK LOOM



8112007 RAFFIA LOOM



8112002 FLANNEL LOOM



8112005 BROWN LOOM



8112008 SISAL LOOM



8112003 CHARCOAL LOOM



8112006 NATURAL LOOM


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	850 g/m² ± 5%
Pile Height	4.1 mm + 15% / - 10%
Total Thickness	7.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BE55AF2F
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.43 kg CO ₂ eq. /m²



PRODUCT WW880 COLOUR NATURAL LOOM INSTALLED ASHLAR



8113001 LINEN DOBBY



8113004 BLACK DOBBY



8113007 RAFFIA DOBBY



8113002 FLANNEL DOBBY



8113005 BROWN DOBBY



8113008 SISAL DOBBY



8113003 CHARCOAL DOBBY



8113006 NATURAL DOBBY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - EC44A5BF
Packaging	4.5 m²
Carbon Footprint (cradle-to-gate)	3.95 kg CO ₂ eq. /m²



PRODUCT WW890 COLOURS BLACK DOBBY & NATURAL DOBBY INSTALLED DESIGN BY TILE



8114001 HEATHER WEAVE



8114004 MOORLAND WEAVE



8114007 GLEN WEAVE



8114002 LOCH WEAVE



8114005 FUCHSIA WEAVE



8114008 DALE WEAVE



8114003 HIGHLAND WEAVE



8114006 AUTUMN WEAVE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DAAA081A
Packaging	4.5 m²
Carbon Footprint (cradle-to-gate)	3.95 kg CO ₂ eq. /m²




PRODUCT WW895 COLOUR HEATHER WEAVE INSTALLED ASHLAR

Woven Gradience Collection | WG100



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2.4% (EN 986)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 01FEC7DD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.57 kg CO ₂ eq. /m²




PRODUCT WG100 COLOURS ROSE & INK INSTALLED MONOLITHIC
PRODUCT WG200 COLOUR INK/ROSE INSTALLED DESIGN BY TILE

Woven Gradience Collection | WG200




Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2.4% (EN 986)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 01FEC7DD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.57 kg CO ₂ eq. /m²



PRODUCT WG100 COLOURS INK, PEARL & STONE INSTALLED MONOLITHIC
PRODUCT WG200 COLOURS CHARCOAL/INK, STONE/CHARCOAL & PEARL/STONE INSTALLED DESIGN BY TILE

Yuton Collection | Yuton 104

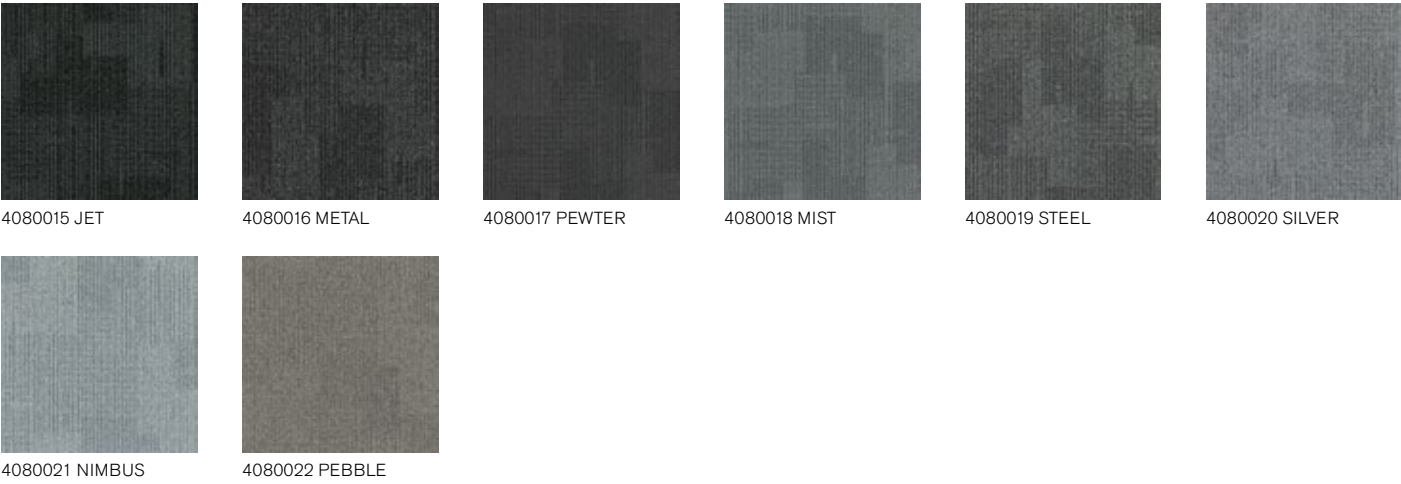

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	541 g/m² ± 5%
Pile Height	2.9 mm + 15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 7FDFFD35
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	6.48 kg CO ₂ eq. /m²




PRODUCT YUTON 104 COLOUR NIMBUS INSTALLED QUARTER TURN

Yuton Collection | Yuton 105



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	551 g/m² ± 5%
Pile Height	3.2 mm +15% / - 10%
Total Thickness	5.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 0F35F8E3
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	6.58 kg CO ₂ eq. /m²



PRODUCT YUTON 105 COLOUR ICE INSTALLED MONOLITHIC

Yuton Collection | Yuton 106



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	561 g/m² ± 5%
Pile Height	2.9 mm +15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 2EEC8F8E
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	6.67 kg CO ₂ eq. /m²



PRODUCT YUTON 106 COLOUR PEARL INSTALLED NON DIRECTIONAL

BARRIER MATTING

PRODUCT BARRICADE TWO COLOUR GREY INSTALLED MONOLITHIC

Barricade Collection

Barricade One




Barricade Two



Barricade One

Backing	CQuest™Bio
Product Definition	Tufted Patterned Textured Cut Pile
Pile Material	100% Nylon
Pile Yarn Weight	750 g/m² ± 5%
Pile Height	4.0 mm + 15% / - 10%
Total Thickness	7.5 mm ± 0.5 mm
Wear Classification	Contract General (EN 1307:32) Class 32 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.0 (EN 985)
Indoor Air Quality	GUT PRODIS - 8C4A0D7C
Packaging	4 m²



Barricade Two

Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	726 g/m² ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Contract General (EN 1307:32) Class 32 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.0 (EN 985)
Indoor Air Quality	GUT PRODIS - 33B6C1E7
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.43 kg CO₂ eq. /m²



PRODUCT BARRICADE ONE COLOUR ANTHRAZITE INSTALLED BRICK

PRODUCT BARRICADE TWO COLOUR BROWN INSTALLED MONOLITHIC

INDEX

Product	Page	Tile Size	100% Recycled Nylon
A Cut Above	46	100 x 100 cm	■
Barricade One	308	50 x 50 cm	
Barricade Two	308	50 x 50 cm	■
Brushed Lines	LVT 18	25 x 100 cm	
City of Angels	48	50 x 50 cm	■
Collins Cottage	50	50 x 50 cm	■
Composure	52	50 x 50 cm	
Composure Edge	54	50 x 50 cm	
Connected Ethos - CE100	56	50 x 50 cm	■
Connected Ethos - CE200	58	50 x 50 cm	■
Contemplation	60	50 x 50 cm	
Darning	62	25 x 100 cm	■
Decibel	64	25 x 100 cm	■
Earthen Forms - Crossroads	LVT 20	25 x 100 cm	
Earthen Forms - Hearth	LVT 22	50 x 100 cm	
Earthen Forms - On Grain	LVT 24	25 x 100 cm	
Elevation III	66	50 x 50 cm	■
Embodied Beauty - Geisha Gather	68	25 x 100 cm	
Embodied Beauty - Sashiko Stitch	70	25 x 100 cm	
Embodied Beauty - Shishu Stitch	[-CO ₂] 72	25 x 100 cm	
Embodied Beauty - Simple Sash	74	25 x 100 cm	
Embodied Beauty - Tokyo Texture	[-CO ₂] 76	25 x 100 cm	
Embodied Beauty - Vintage Kimono	78	25 x 100 cm	
Embodied Beauty - Zen Stitch	[-CO ₂] 80	25 x 100 cm	
Employ Constant	82	50 x 50 cm	
Employ Dimensions	84	25 x 100 cm	
Employ Lines	86	50 x 50 cm	
Employ Loop	88	50 x 50 cm	
Equilibrium	90	50 x 50 cm	■
Etched & Threaded - E610	92	50 x 50 cm	■
Etched & Threaded - E611	94	50 x 50 cm	■
Etched & Threaded - E612	96	25 x 100 cm	■
Etched & Threaded - E613	98	25 x 100 cm	■
Etched & Threaded - E614	100	25 x 100 cm	■
Etched & Threaded - E615	102	25 x 100 cm	■
Etched & Threaded - E616	104	25 x 100 cm	■
Fresco Valley - Cliff	LVT 26	25 x 100 cm	
Fresco Valley - Great Heights	LVT 28	25 x 100 cm	
Fresco Valley - Ridge	LVT 30	50 x 50 cm	

Product	Page	Tile Size	100% Recycled Nylon
Haptic	106	25 x 100 cm	■
Head Over Heels M0684	108	100 x 100 cm	■
Head Over Heels M0749	110	100 x 100 cm	■
Head Over Heels M0827	112	100 x 100 cm	■
Head Over Heels M1032	114	50 x 50 cm	■
Heuga 530 II	116	50 x 50 cm	■
Heuga 580 II	118	50 x 50 cm	■
Heuga 725	120	50 x 50 cm	■
Heuga 727 (Piece Dyed, PD)	122	50 x 50 cm	■
Heuga 727 (Solution Dyed, SD)	124	50 x 50 cm	■
Hip Over History	126	100 x 100 cm	■
Human Connections - Flagstone	128	50 x 50 cm	■
Human Connections - Kerbstone	128	50 x 50 cm	■
Human Connections - Paver	130	50 x 50 cm	■
Human Connections - Moss	132	50 x 50 cm	■
Human Connections - Moss in Stone	132	50 x 50 cm	■
Human Connections - Rue	134	50 x 50 cm	■
Human Connections - Sett in Stone	132	50 x 50 cm	■
Human Connections - Stone Course	134	50 x 50 cm	■
Human Nature - HN810	136	25 x 100 cm	■
Human Nature - HN820	138	25 x 100 cm	■
Human Nature - HN830	140	25 x 100 cm	■
Human Nature - HN840	142	25 x 100 cm	■
Human Nature - HN850	144	25 x 100 cm	■
Hydropolis	146	50 x 50 cm	■
Ice Breaker	148	50 x 50 cm	
Level Set - Natural Stones	LVT 32	50 x 50 cm	
Level Set - Natural Woodgrains	LVT 34	25 x 100 cm	
Level Set - Textured Stones	LVT 32	50 x 50 cm	
Level Set - Textured Woodgrains	LVT 36	25 x 100 cm	
Look Both Ways - Step Aside	150	50 x 50 cm	
Look Both Ways - Step in Time	152	50 x 50 cm	
Look Both Ways - Step it Up	154	50 x 50 cm	
Look Both Ways - Step this Way	156	50 x 50 cm	
Look Both Ways - Walk About	LVT 38	50 x 50 cm	
Look Both Ways - Walk of Life	LVT 38	50 x 50 cm	
Look Both Ways - Walk on By	LVT 40	50 x 50 cm	
Look Both Ways - Walk the Aisle	LVT 40	50 x 50 cm	
Luxury Collection LC02	158	100 x 100 cm	■

Product	Page	Tile Size	100% Recycled Nylon
Luxury Collection LC05	160	50 x 50 cm	■
Mod Café	162	50 x 50 cm	■
Net Effect - B601	164	50 x 50 cm	■
Net Effect - B602	164	50 x 50 cm	■
Net Effect - B603	164	50 x 50 cm	■
New Horizons II	166	50 x 50 cm	
Northern Grain	LVT 42	25 x 100 cm	
NY+LON Streets - Broome Street	168	50 x 50 cm	
NY+LON Streets - Dover Street	170	50 x 50 cm	
NY+LON Streets - Mercer Street	172	50 x 50 cm	
NY+LON Streets - Old Street	174	50 x 50 cm	
NY+LON Streets - Reade Street	176	50 x 50 cm	
NY+LON Streets - Wheeler Street	178	50 x 50 cm	
Off Line	180	25 x 100 cm	■
On Line	182	25 x 100 cm	■
Open Air 401	184	25 x 100 cm	■
Open Air 402	186	25 x 100 cm	■
Open Air 403	188	50 x 50 cm	■
Open Air 403 Accent	190	50 x 50 cm	■
Open Air 403 Transition	192	50 x 50 cm	■
Open Air 404	194	50 x 50 cm	■
Open Air 404 Accent	196	50 x 50 cm	■
Open Air 404 Transition	198	50 x 50 cm	■
Open Air 405	200	50 x 50 cm	■
Overedge	202	25 x 100 cm	■
Past Forward - Antiquities	204	50 x 50 cm	■
Past Forward - Archival	206	50 x 50 cm	■
Past Forward - Arley	208	50 x 50 cm	■
Past Forward - Cheshire Street	210	50 x 50 cm	■
Past Forward - Circa Then	212	50 x 50 cm	■
Past Forward - Decades	214	50 x 50 cm	■
Past Forward - Fortnight	216	50 x 50 cm	■
Past Forward - Newstalgia	218	50 x 50 cm	■
Past Forward - Reeling	220	50 x 50 cm	■
Past Forward - Rekindled	222	50 x 50 cm	■
Past Forward - Retrospec	224	50 x 50 cm	■
Past Forward - Unspooled	226	50 x 50 cm	■
Past Forward - Unwound	228	50 x 50 cm	■
Past Forward - Yesterdays	230	50 x 50 cm	■

Product	Page	Tile Size	100% Recycled Nylon
Polichrome Solid	232	50 x 50 cm	■
Polichrome Stipple	234	50 x 50 cm	■
Portmanteau PM19	236	50 x 100 cm	■
Portmanteau PM39	238	50 x 100 cm	■
Portmanteau PM49	240	50 x 100 cm	■
Recreation	242	50 x 50 cm	■
RMS 607	244	50 x 50 cm	■
Sampa	246	50 x 50 cm	■
Superflor II	248	50 x 50 cm	
The Scandinavian Collection	250	50 x 50 cm	
Touch & Tones II 101	252	50 x 50 cm	■
Touch & Tones II 102	254	50 x 50 cm	■
Touch & Tones II 103	256	50 x 50 cm	■
Touch of Timber	258	25 x 100 cm	■
Transformation	260	50 x 50 cm	
Upon Common Ground - Dry Bark	262	25 x 100 cm	■
Upon Common Ground - Escarpment	264	50 x 50 cm	■
Upon Common Ground - Sandbank	266	25 x 100 cm	■
Upon Common Ground - Shallows	268	25 x 100 cm	■
Upon Common Ground - Undulating Water	270	25 x 100 cm	■
Urban Retreat - UR101	272	50 x 50 cm	■
Urban Retreat - UR102	272	50 x 50 cm	■
Urban Retreat - UR103	272	50 x 50 cm	■
Works Effect	274	50 x 50 cm	
Works Element	276	50 x 50 cm	
Works Flow	278	50 x 50 cm	
Works Freestyle	280	25 x 100 cm	
Works Sense	282	50 x 50 cm	
World Woven - WW860	284	25 x 100 cm	■
World Woven - WW865	286	25 x 100 cm	■
World Woven - WW870	288	25 x 100 cm	■
World Woven - WW880	290	25 x 100 cm	■
World Woven - WW890	292	25 x 100 cm	■
World Woven - WW895	294	25 x 100 cm	■
Woven Gradience - WG100	296	50 x 50 cm	■
Woven Gradience - WG200	298	50 x 50 cm	■
Yuton 104	300	50 x 50 cm	
Yuton 105	302	50 x 50 cm	
Yuton 106	304	50 x 50 cm	

All the pictures in Workbook 2026/26 are represented as accurately as the printing process will allow.
Please order a sample tile to check the exact colour of our product before ordering.

Interface European Manufacturing BV reserves the right to change or modify specifications.
Please see website for latest specifications.

GET IN TOUCH

Europe, Middle East & Africa

AE	+971 44508175
AT	+43 1 8102839
BA	+387 33 522 534
BE	+32 2 475 27 27
BG	+359 2 808 303
BY	+375 17 226 75 14
CH	+41 44 913 68 00
CZ	+42 0 233 087 111
DE	+49 2151 3718 0
DK	+45 33 79 70 55
EE	+372 6518 313
ES	+34 932 418 750
EG	+(202) 3760 7818
FR	+33 1 58 10 20 20
GR	+30 211 2120820
HR	+385 14 62 30 63
HU	+36 1 349 6545
IE	+353 1 679 8466
IL	+972 97403034
IT	+39 02 890 93678
KZ	+7 701 391 88 13
LT	+370 37 337332
LV	+371 672 18 744
NL	+31 33 277 5555
ME	+381 11 414 92 00
MK	+389 2 323 01 89
NO	+47 23 12 01 70
PL	+48 22 862 48 40
PT	+351 217 122 740
RO	+40 21 317 12 40/42/43/44
RS	+381 11 414 92 00
SA	+966 554622263
SE	+468 241 230
SK	+421 911 104 073
SI	+386 8 205 4007
TR	+ 90 212 248 97 77
UA	+38(044)238 27 67
UK	+44 (0)800 3134465
ZA	+27 11 608 4270

www.interface.com



BROMIXDENA056 04/2025

